

1544 Globo LED


Housing: In vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized.

Diffuser: In anti-glare, vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized, smooth outside, dustproof.

Lampholder: In polycarbonate, phosphor bronze contacts. Socket E27.

Equipment: Gasket in environment-friendly material. Cable gland in fiber glass nylon Ø 1/2 gas thread (cable min. Ø 9 max. Ø 12).

Regulations: Produced according to applicable IEC 598 - CEI 34 - 21 standards, IP65 degree of protection according to EN 60529 standards. Double insulation.

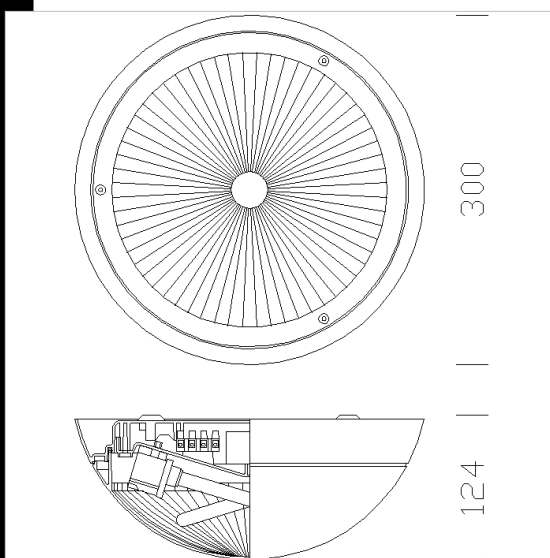

Code	Gear	Kg	WTot	Colour
427246-00	CLD S	0,77	0 W	GREY



Download

DXF 2D
- 1544glb.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated