

## 1244 Torpedo bike trails



Housing: In die-cast aluminium.

Reflector: In anodized and polished 99.90 aluminium.

Diffuser: Tempered protective glass, 5 mm thick, impact and thermal shock resistance, anti-dazzle.

Coating: Graphite grey or frosted silver polyester powder coating applied , resistant to corrosive and saline environments.

Lampholder: In ceramics, with silver contacts. Socket E27.

Electric gear: 230V/50Hz power supply. Silicone wire terminated with quick-

connect clamps in admiralty brass, with glass braid, 1.0 sqmm cross section.  
2P terminal block with maximum allowed lead cross section: 2.5 sqmm.


Mounting: On wall or Ø 60 mm pole.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP44IK08 degree of protection according to EN 60529 standards. It has been granted the ENEC European Certificate of Conformity. Insulation Class II.

Lamp: Supplied with SAP-T70

Non-polluting louvre, ideal for installation in UNI10819 zone 1.

Wind surface: 590 sqcm.

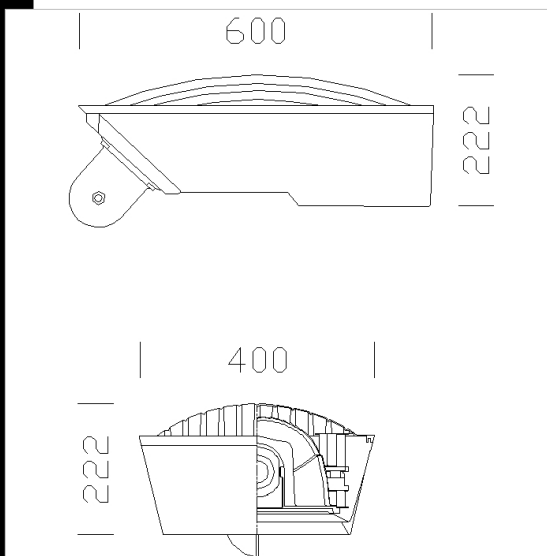

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
427642-00	CNR-L	9.15	SAP-T 70-6000lm-2000K-Ra 4	83 W	E27	GREY9007/GRAF
427643-00	CNR-L	9.15	JM-T 70-5300lm-4000k-Ra 1b	83 W	E27	GREY9007/GRAF

## Accessories



- 455 small pole connection



- 406 Short 'Aliante' arm



- 456 wall connection



- 407 Double 'Aliante' arm

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated