















1275 Green




Housing: In fiberglass nylon, vandal resistant.
 Diffuser: In matt polycarbonate, anti-dazzle, vandal resistant and V2 self-extinguishing, UV-stabilized.
 Reflector: In hammered anodized, polished 99.85 aluminium.
 Equipment: Gasket in environment-friendly material. Cable gland in f.g. nylon Ø 1/2 gas thread (cable min Ø 9 max Ø 12). Retained antivandal steel screws.
 Regulations: Produced according to applicable EN60598 -1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.
 Luminous flux maintenance 70%: 50000h (L70B50)

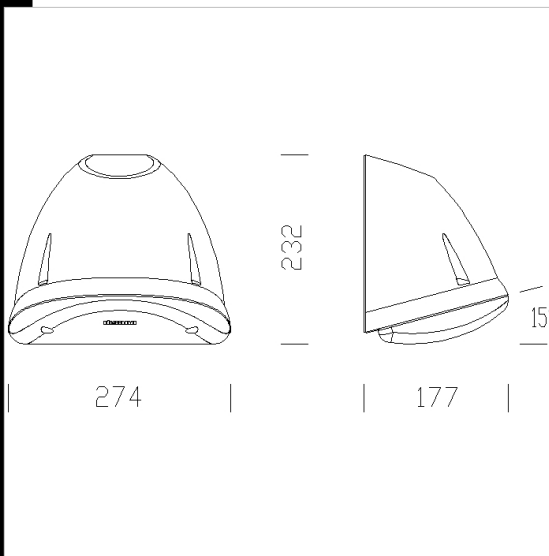






Download

DXF 2D
- 1285.dxf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
428605-00	CLD	0.92	LED-1300lm-4000K-CRI 80	14 W	GREY

Accessories



- 503 ø 60 double connection



- 502 ø 60 single connection

Posts



- 5 fiberglass pole

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated