

IK08	S	CNRL
CELL		
IP54		




1207 Box

Housing: In nylon. Complete with vertically linear grid.
 Frame: In die-cast aluminium.
 Diffuser: In plexiglass.

Painting: Epoxy cationic electrocoating, resistant to corrosive and saline environments, upon chromate treatment, rough finish with acrylic coating.
 Lampholder: In white polycarbonate, contacts in phosphor bronze. Socket G23. In ceramics, socket E14.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P terminal block with maximum allowed lead cross section of 2.5 sqmm.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP54IK08 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ). They have obtained the ENEC European Certificate of Conformity. Double insulation class.

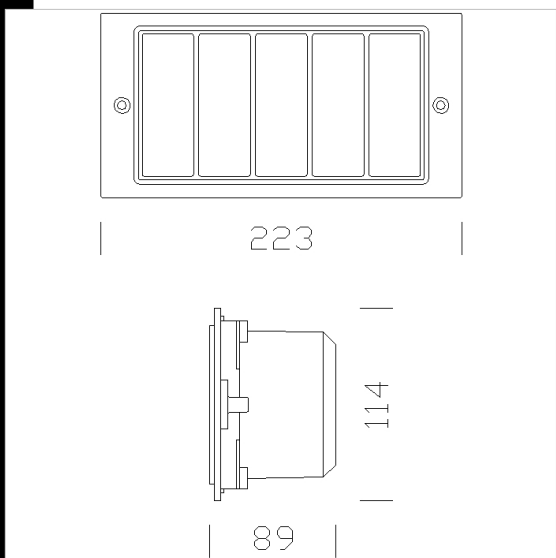

Download
 DXF 2D
 - 1207box.dxf
 Montaggi
 - box.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
431521-08	CELL	0,64	FLC 1x7S/E	G23	400lm-4000K-Ra 1b	GRAPHITE
431522-08	CELL	0,58	FLC 2x7S	G23	400lm-4000K-Ra 1b	GRAPHITE
431501-00	S	0,50	I	E14	--	GRAPHITE
431521-00	CELL	0,60	FLC 1x7S/E	G23	400lm-4000K-Ra 1b	GRAPHITE
431522-00	CELL	0,98	FLC 2x7S/E	G23	400lm-4000K-Ra 1b	GRAPHITE