






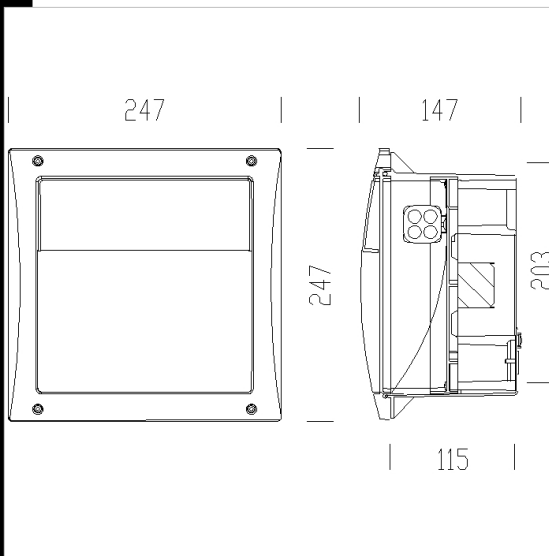

1627 Box 2 - with asymmetric eyelid diffuser


Housing: Square-shaped in f.g. nylon, grey (RAL 7035), vandal-resistant, UV-stabilized
 Frame: In UV-stabilized ASA, grey (RAL 7045) with eyelid shield.
 Diffuser: In vandal-resistant, V2 self-extinguishing polycarbonate, UV-stabilized
 Reflector: in bright white, vandal resistant, V2 self-extinguishing, UV-stabilized polycarbonate.
 Lampholder: In polycarbonate, with phosphor bronze contacts
 Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.
 Equipment: Rubber gasket. With polycarbonate gear tray
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces. Double insulation class.







Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
431742-00	CELL	1.90	FLC 1x18D/E-1200lm-4000K-Ra 1b	19 W	G24Q-2	GREY



CNRL CELL 



  

IP65  EL 

U.V.  

P  

 IK08 

Download
 DXF 2D
 - d1627.dxf
 Montaggi
 - box 2.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated