

Download


DXF 2D
- 1629.dxf

3DS
- disano_1629_fonte.3ds

3DM
- disano_1629_fonte.3dm

Montaggi
- fonte 04-21.pdf

BIM
- 1629 Fonte LED - 20200611.zip

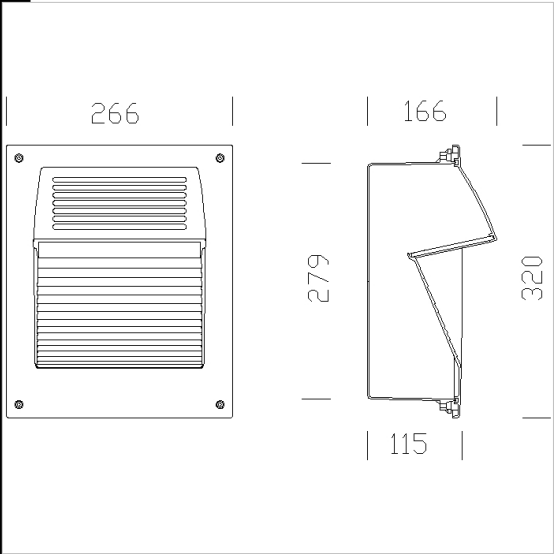

1629 Fonte LED

Housing: UV-stabilized f.g. nylon.
Front frame: in die-cast aluminium.
Diffuser: in tempered glass, 4 mm thick, resistant to impact and thermal shock.
Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
431752-2191	CLD CELL	2,20	LED-76lm-4000K-CRI>80	4 W	CORTEN
431752-00	CLD	2,20	LED-76lm-4000K-CRI>80	4 W	GREY9007

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated