




Download

- DXF 2D
- 1631.dxf
- 3DS
- disano_1636_fonte.3ds
- 3DM
- disano_1636_fonte.3dm
- Montaggi
- fonte.pdf
- BIM
- 1636 Fonte - mono-lamp - 20200611.zip



1636 Fonte - mono-lamp

Housing: UV-stabilized f.g. nylon.
 Front frame: in die-cast aluminium.
 Diffuser: in tempered glass, 4 mm thick, resistant to impact and thermal shock.
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
 Electric gear: 230V/50Hz power supply.
 Standard supply: electric gear on removable tray for easy maintenance.
 Complete with 2.5 mm² socket-pin connector
 Column: in galvanized steel with f.g. nylon cover and sandblasted silver coating.

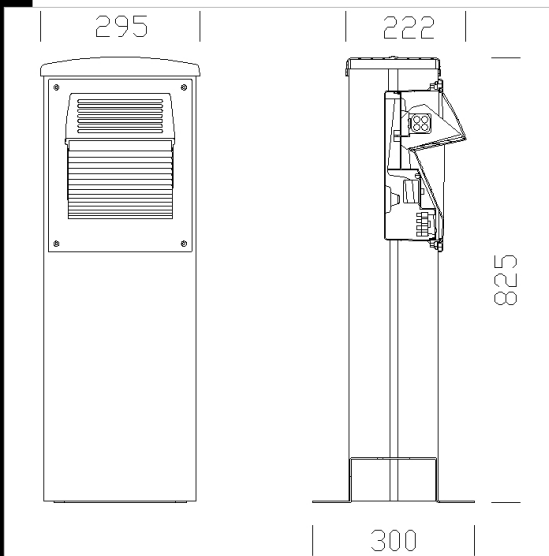

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
431762-00	CLD CELL	9,93	LED-480lm-4000K-CRI>80	5 W	GREY9007

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated