


2576 Square - with lens

Housing: in die-cast aluminium. Diffuser: in extra-clear tempered glass, 4 mm thick, thermal shock and impact resistant.

Lens: in PMMA with high efficiency output and very low glare rate. Coating: cycle de peinture liquide standard, par immersion, se compose de plusieurs phases : une première phase de prétraitement superficiel du métal, une couche de peinture cataphorèse résistante à la corrosion et au brouillard salin, une couche finale de peinture liquide acrylique bi-composante stabilisée aux rayons UV. Standard supply: supplied with plate for wall installation and cable with with IP68 airtight connector for mains connection. On request: DIMM 1/10 or DALI versions; 3000K versions with sub-code -39. Coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments.

LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0.92. Mounting: rapid connection, the fixture does not need to be opened. Photobiological risk: exempt, pursuant to EN62471.

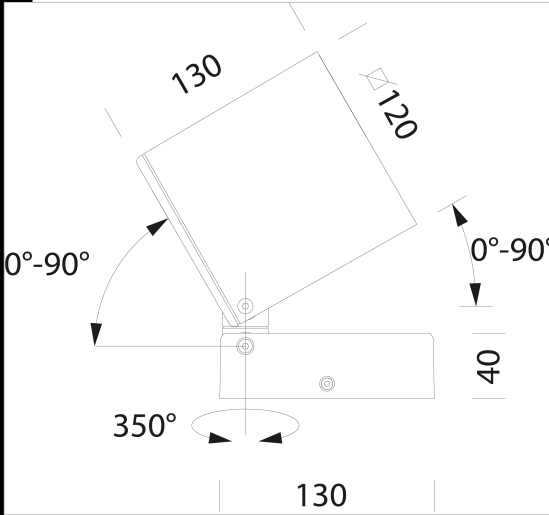

Download

- DXF 2D
- 2576.dxf
- 3DS
- disano_2576_square.3ds
- 3DM
- disano_2576_square.3dm
- Montaggi
- Square_2018.pdf
- BIM
- 2576_Square - with lens - 20200611.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
431850-00	CLD CELL	2.54	LED COB-2888lm-4000K-15°-CRI 90	43 W	WHITE
431851-00	CLD CELL	2.50	LED COB-2888lm-4000K-15°-CRI 90	43 W	GRAPHITE
431852-00	CLD CELL	2.56	LED COB-3013lm-4000K-30°-CRI 90	43 W	WHITE
431853-00	CLD CELL	2.60	LED COB-3013lm-4000K-30°-CRI 90	43 W	GRAPHITE
431854-00	CLD CELL	2.50	LED COB-2595lm-4000K-60°-CRI 90	43 W	WHITE
431855-00	CLD CELL	2.66	LED COB-2595lm-4000K-60°-CRI 90	43 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated