



Download

DXF 2D
- 2537.dxf

Montaggi
- 2537_09-21.pdf


BIM
- 2537 Koala Big - with reflector -
20210310.zip



2537 Koala Big - with reflector

Housing/frame: in die-cast aluminium with central articulated joint in die-cast aluminium. Base: in die-cast aluminium. Reflector: in high-performance silver aluminium

Coating: with special surface treatment for marine environments in compliance with UNI EN ISO 9227 regulation. Diffuser: in extra clear tempered glass, 4 mm thick, resistant to thermal shocks and impacts. Grey 9006 coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating. On request: coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. Standard Supply: electronic safety device to protect the LED module and the related ballast compliant with EN 61547.. LED: Power factor 0.92. LED: Luminous flux maintenance 80%: 50.000h (L80B20).

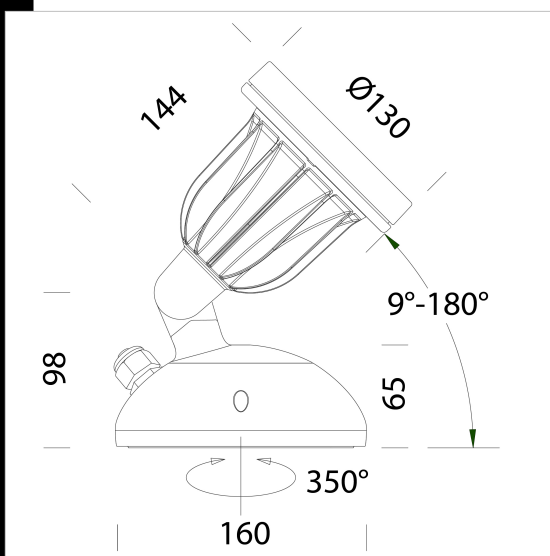

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
431880-00	CLD	1,45	LED COB-2832lm-4000K-13°-CRI 90	28 W	GREY
431882-00	CLD	1,80	LED COB-2920lm-4000K-28°-CRI 90	28 W	GREY
431883-00	CLD	1,45	LED COB-2916lm-4000K-48°-CRI 90	28 W	GREY
431884-00	CLD	1,47	LED COB-3725lm-4000K-13°-CRI 90	42 W	GREY
431885-00	CLD	1,47	LED COB-3842lm-4000K-28°-CRI 90	42 W	GREY
431886-00	CLD	1,47	LED COB-3836lm-4000K-48°-CRI 90	42 W	GREY
431880-0041	CLD-D-D	1,80	LED COB-2832lm-4000K-13°-CRI 90	28 W	GREY
431882-0041	CLD-D-D	1,80	LED COB-2920lm-4000K-28°-CRI 90	28 W	GREY
431883-0041	CLD-D-D	1,80	LED COB-2916lm-4000K-48°-CRI 90	28 W	GREY
431884-0041	CLD-D-D	1,80	LED COB-3725lm-4000K-13°-CRI 90	42 W	GREY
431885-0041	CLD-D-D	1,80	LED COB-3842lm-4000K-28°-CRI 90	42 W	GREY
431886-0041	CLD-D-D	1,80	LED COB-3836lm-4000K-48°-CRI 90	42 W	GREY

Accessori



- 119 peg

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated