



Download

DXF 2D
- 1524_elfo.dxf

3DS
- disano_1524_elfo.3ds


3DM
- disano_1524_elfo.3dm

Montaggi
- elfo.pdf



1524 Elfo 35/70W wide beam

Housing: Die-cast aluminium with cooling fins
Reflector: Anodised and polished turned aluminium
Diffuser: Tempered glass 4 mm thermal shock and impact resistant
Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
Lampholder: Ceramic with silver-plated contacts
Electric gear: 230V power supply with heat protection. Wire terminated with admiralty brass clamps, silicone insulation cross section: 1 sqmm. 2P terminal block (maximum allowed lead cross section 2.5 sqmm.)
Equipment: Silicone rubber gasket. Fibreglass nylon cable gland, Ø ½ " gas.
Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

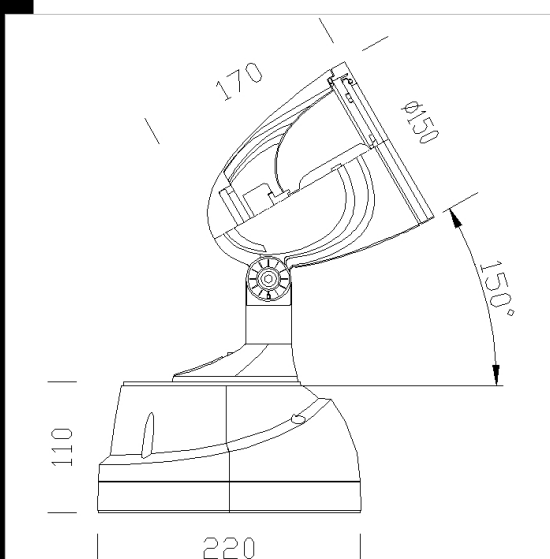

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
431923-00	CNR-L	2,65	CDM-T 70-6600lm-4200k-Ra 1b	83 W	G12	GRAPHITE
431922-00	CNR-L	2,65	CDM-T 35-3500lm-3000K-Ra 1b	42 W	G12	GRAPHITE
431920-00	CNR-L	2,65	CDM-T 35-3500lm-3000K-Ra 1b	42 W	G12	GREY9006
431921-00	CNR-L	2,65	CDM-T 70-6600lm-4200k-Ra 1b	83 W	G12	GREY9006

Accessori



- 119 peg



- 120 pole mount



- 186 conveyor



- 187 four-sided shutter



- 189 coloured filter



- 190 baffle louver



- 188 plate

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated