


1521 Elfo for Pegaso CDM-T70

Housing: Die-cast aluminium with cooling fins
 Reflector: Anodised and polished turned aluminium and anti-glare concentrating reeds
 Diffuser: Tempered glass 4 mm thermal shock and impact resistant
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
 Lampholder: Ceramic with silver-plated contacts
 Electric gear: 230V power supply with heat protection. 2P terminal block (maximum allowed lead cross section 2.5 sqmm.)
 Equipment: Silicone rubber gasket. Fibreglass nylon cable gland, Ø ½ " gas.
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

Download

- DXF 2D
- 1521.dxf
- 3DS
- disano_1521_elfo.3ds
- 3DM
- disano_1521_elfo.3dm

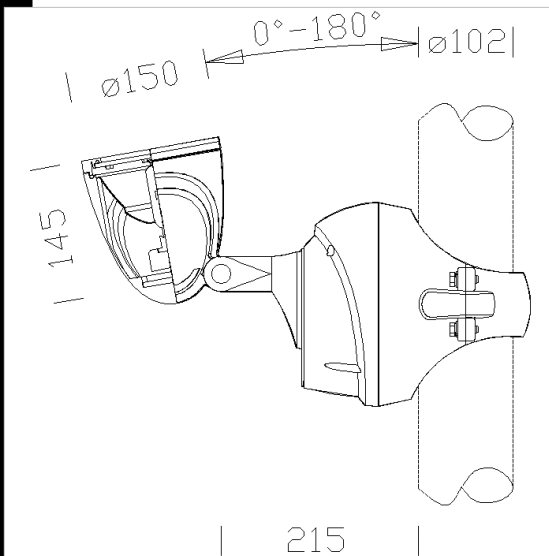

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
432030-00	CNR-L	4.30	CDM-T 70-6600lm-4200k-Ra 1b	83 W	G12	GREY9006

Accessories



- 190 baffle louvre



- 389 Pegaso wall mounted



- 388 double Pegaso



- 387 single Pegaso



- 460 wall mounting

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated