


1539 Elfo ESALED Fullcolor

Housing: Die-cast aluminium with cooling fins
 Diffuser: Tempered glass 4 mm thermal shock and impact resistant
 Coating: Sand-blasted silver-grey or graphite grey polyester powder coating applied, resistant to corrosive and saline environments.
 Equipment: Silicone rubber gasket. Fibreglass nylon cable gland, Ø ½ " gas.
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.
 Complete the ESALED fullcolor with DMX integrated

Download

- DXF 2D
- 1539.dxf
- 3DS
- disano_1539_elfo.3ds
- 3DM
- disano_1539_elfo.3dm
- Montaggi
- elfo_DMx.pdf
- elfo.pdf

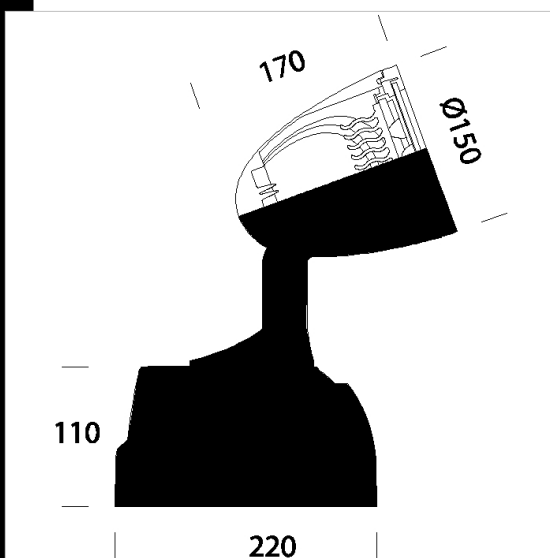

Code	Gear	Kg	Watt	Base	Lamps	Colour
432834-00	CLD CELL	3,60	ESALED fullcolor	-	350mA--60°	SANDBLASTED SILVER
432834-2191	CLD CTL	3,60	ESALED fullcolor	-	350mA--40°	CORTEN

Accessori

