


Download  
DXF 2D  
- 1523h.dxf



## 1523 Elfo LED with rod

A complete product designed to fulfil the needs of any lighting designer  
Housing: Die-cast aluminium with cooling fins  
Reflector: Anodised and polished turned aluminium  
Diffuser: Tempered glass 4 mm thermal shock and impact resistant  
Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
Equipment: Silicone rubber gasket. Fibreglass nylon cable gland, Ø ½ " gas.  
Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.  
life 50.000h at 80% L80B20  
Photobiological safety class: risk group 1, not dangerous

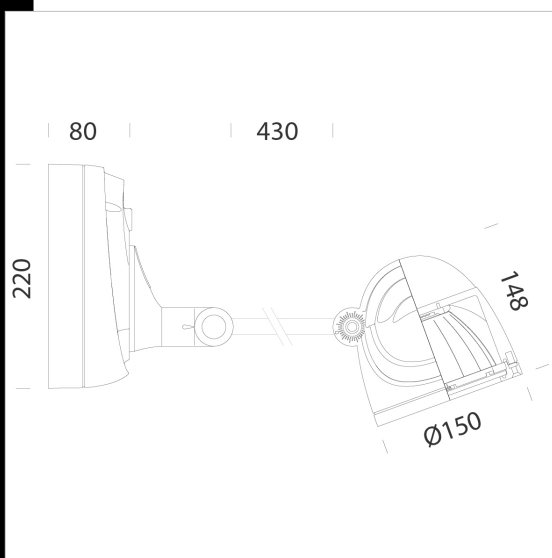

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
432835-00	CLD	3.13	LED COB-5300lm-4000K-40°-CRI 80	54 W	GRAPHITE

### Accessories



- 188 plate



- 119 peg



- 116 corner support



- 120 pole mount

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated