


**Download**  
 DXF 2D  
 - 1230c.dxf  
 3DS  
 - disano\_1230\_faro.3ds  
 3DM  
 - disano\_1230\_faro.3dm  
 Montaggi  
 - faro\_faro3\_faro4\_tn.pdf  
 - 1230.dxf



**1230 Faro - high version**

Housing: In extruded aluminium, cylindrical section, Ø 180.  
 Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized. Louvre in anodized 99.85 aluminium.  
 Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
 Lampholder: In white polycarbonate, with phosphor bronze contacts (FLC), socket 2G11. In ceramics with silver-plated contacts. Socket E27.  
 Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.  
 Standard supply: With base and anchor bolts to bury. Supplied with socket-pin connector for quick installation and air recycle valve.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK10 degree of protection in compliance with EN 60529 standards. They have obtained ENEC European Certificate of Conformity.  
 Non-polluting louvre, ideal for installation in zone 3 (UNI10819).

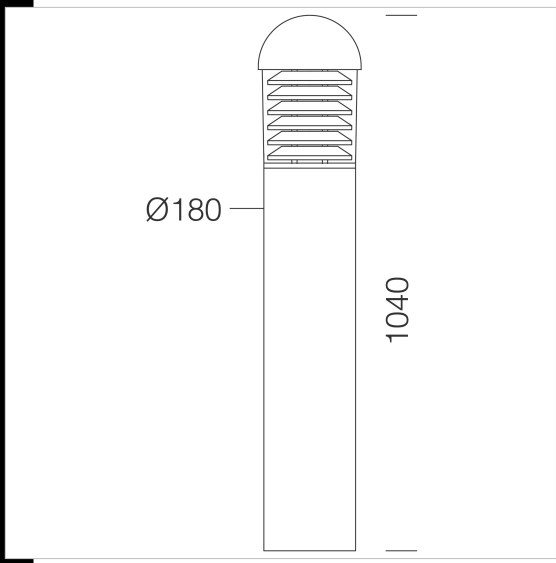

| Code      | Gear | Kg   | Lumen-K-CRI | WTot | Base | Colour   |
|-----------|------|------|-------------|------|------|----------|
| 510003-00 | S    | 5.93 | MAX 75---   | 0 W  | E27  | GRAPHITE |
| 510004-00 | S    | 5.93 | MAX 75---   | 0 W  | E27  | GREY9007 |

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated