


1797 Faro 3 LED - short version

Housing: In extruded aluminium, cylindrical section, Ø 180.
 Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized.
 Painting: In several stages. First stage: black epoxy cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV-stabilizing primer, and lastly rough finish with graphite acrylic coating.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP64IK08 degree of protection in compliance with EN 60529 standards.
 Standard supply: with air recycle valve. Supplied with socket-pin connector for quick installation
 Working life: 40,000 h (from -30° to +50° C - Ta=25°C).
 LED: 900lm - 10W tot, 110mA.

Download

- DXF 2D
- 1797i.dxf
- 3DS
- disano_1797_faro_3.3ds
- 3DM
- disano_1797_faro_3.3dm
- Montaggi
- faro led montaggio.dxf

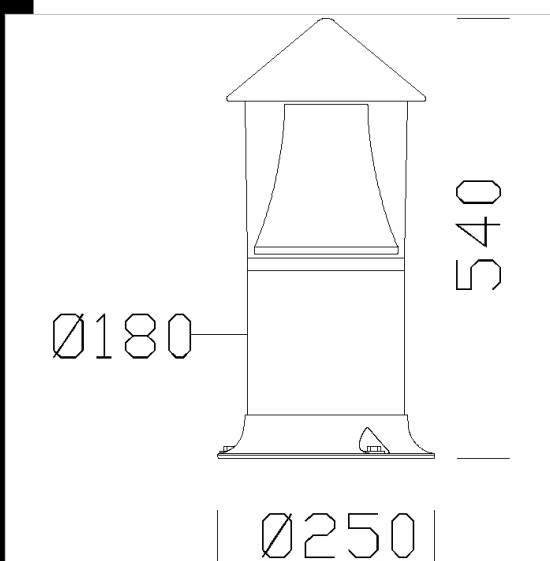

Code	Gear	Kg	Watt	Base	Lamps	Colour
510015-00	CLD CELL	4,30	LED white		900lm-4000K-CRI>80	GRAPHITE
510015-2191	CLD CTL	4,00	LED white		900lm-4000K-CRI>80	CORTEN