


1730 Faro 3 - high version



Housing: In extruded aluminium, cylindrical section, Ø 180.  
 Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized. Louvre in anodized 99.85 aluminium.  
 Painting: In several stages. First stage: black epoxy cationic electrocoating, upon chromate treatment, resistant to corrosive and saline environments. Second stage: UV-stabilizing primer, and lastly rough finish with gris coating.  
 Lampholder: In white polycarbonate, with phosphor bronze contacts (FLC), socket G24q. In ceramics with silver-plated contacts. Socket E27.  
 Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.  
 Standard supply: With base and anchor bolts to bury. Supplied with socket-pin connector for quick installation and air recycle valve  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK10 degree of protection in compliance with EN 60529 standards. They have obtained ENEC European Certificate of Conformity. Non-polluting louvre, ideal for installation in zone 1 (UNI10819).

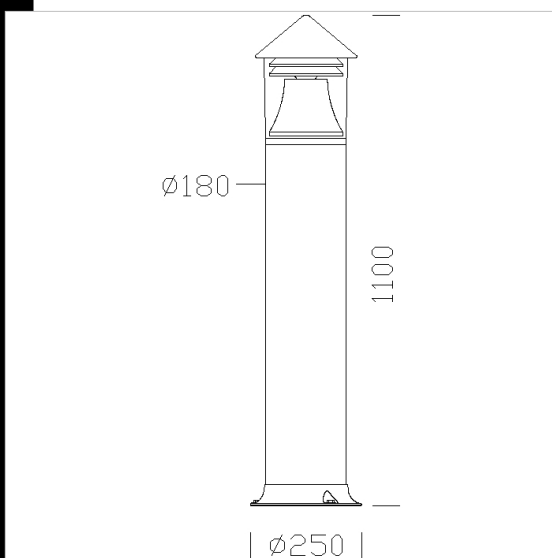

Code	Gear	Kg	Watt	Base	Lamps	Colour
510021-00	CNR-L	7,10	SAP-T 70	E27	6000lm-2000K-Ra 4	GRAPHITE
510022-00	CNR-L	7,10	JM-E 70	E27	5300lm-4000k-Ra 1b	GRAPHITE
510020-08	CELL	6,08	FLC 1x26T/E	Gx24q-3	1800lm-4000K-Ra 1b	GRAPHITE

Accessories



- 399 Connector for solid line

CNRL CELL

IP65

UV

ZONA 1 IK10 3° IP IK

EL

Download

- DXF 2D  
- 1730i.dxf
- 3DS  
- disano\_1730\_faro\_3.3ds
- 3DM  
- disano\_1730\_faro\_3.3dm
- Montaggi  
- faro\_faro3\_faro4\_tn.pdf