



### 1796 Faro 3 LED - high version

Housing: In extruded aluminium, cylindrical section, Ø 180.  
Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized.


Painting: In several stages. First stage: black epoxy cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV-stabilizing primer, and lastly rough finish with graphite acrylic coating.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP64IK08 degree of protection in compliance with EN 60529 standards.

Standard supply: with air recycle valve. Supplied with socket-pin connector for quick installation

Working life: 40,000 h (from -30° to +50° C - Ta=25°C).

LED: 900lm - 10W tot, 110mA.

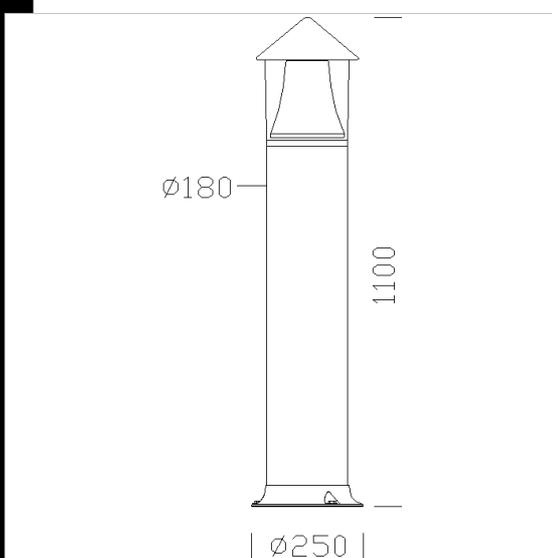

#### Download

DXF 2D  
- 1796.dxf

3DS  
- disano\_1796\_faro\_3.3ds

3DM  
- disano\_1796\_faro\_3.3dm

Montaggi  
- faro led montaggio.dxf

Code	Gear	Kg	Watt	Base	Lamps	Colour
510025-2191	CLD CELL	6,00	LED white		900lm-4000K-CRI>80	CORTEN
510025-00	CLD CELL	6,72	LED white		900lm-4000K-CRI>80	GRAPHITE