

1734 Faro 3 special

Housing: In extruded aluminium, cylindrical section, Ø 180.
Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized.


Painting: In several stages. First stage: black epoxy cationic electrocoating, upon chromate treatment, resistant to corrosive and saline environments. Second stage: UV-stabilizing primer, and lastly rough finish with gris coating.

Lampholder: In white polycarbonate, with phosphor bronze contacts (FLC), socket G24q. In ceramics with silver-plated contacts. Socket E27.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP43IK10 degree of protection in compliance with EN 60529 standards.

Non-polluting louvre, ideal for installation in zone 1 (UNI10819).

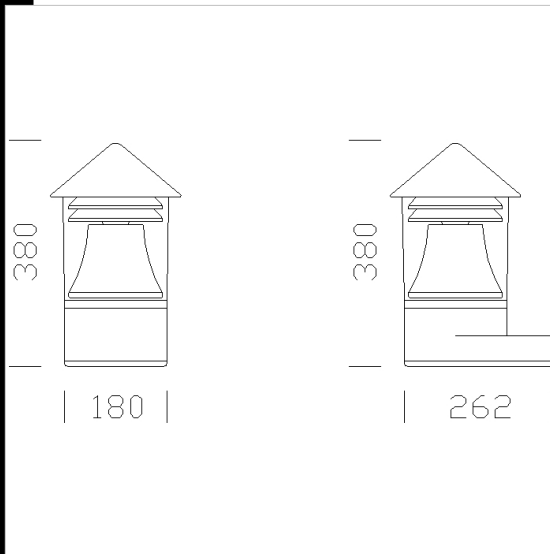

Download

- DXF 2D
- 1734.dxf
- 3DS
- disano_1734_faro_3.3ds
- 3DM
- disano_1734_faro_3.3dm
- Montaggi
- faro_faro3_faro4_tn.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
510110-0016	CNR-L	4,20	FLC 1x26T	G24d-3	1800lm-4000K-Ra 1b	GRAPHITE
510112-0016	CNR-L	4,20	JM-E 70	E27	4700lm-4000K-Ra 1b	GRAPHITE