



1231 Faro - high version

Housing: In extruded aluminium, cylindrical section, Ø 180.
Diffuser: In vandal resistant and V2 self-extinguishing opal polycarbonate, UV-stabilized.

Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.


Lampholder: In white polycarbonate, with phosphor bronze contacts (FLC), socket 2G11. In ceramics with silver-plated contacts. Socket E27.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.

Standard supply: With base and anchor bolts to bury. Supplied with socket-pin connector for quick installation and air recycle valve.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK10 degree of protection in compliance with EN 60529 standards. They have obtained ENEC European Certificate of Conformity.

Non-polluting louvre, ideal for installation in zone 3 (UNI10819).

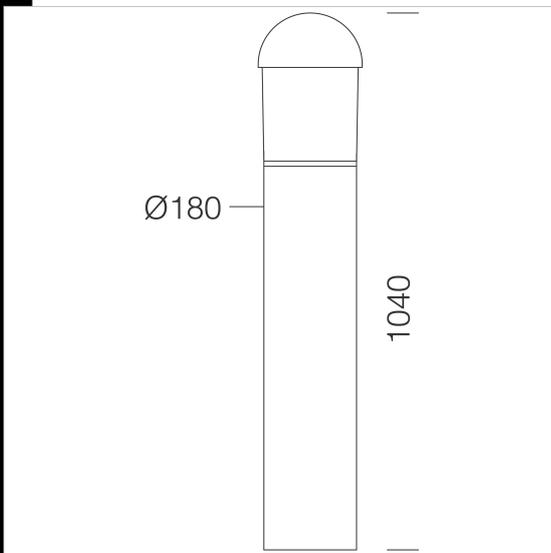

Download

DXF 2D
- 1231c.dxf

3DS
- disano_1231_faro.3ds

3DM
- disano_1231_faro.3dm

Montaggi
- faro_faro3_faro4_tn.pdf
- 1231.dxf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
510136-00	CNR-L	6.70	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GRAPHITE
510103-00	S	5.53	MAX 75---	0 W	E27	GRAPHITE
510105-00	CNR-L	6.91	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GREY9007
510139-08	CELL	6.10	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GRAPHITE
510104-00	S	5.51	MAX 75---	0 W	E27	GREY9007
510107-08	CELL	6.20	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GREY9007

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated