



## 1232 Faro - short version



**Housing:** In extruded aluminium, cylindrical section, Ø 180.  
**Diffuser:** In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized. Louvre in anodized 99.5 aluminium.  
**Painting:** the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
**Lampholder:** In white polycarbonate, with phosphor bronze contacts (FLC), socket 2G11. In ceramics with silver-plated contacts. Socket E27.  
**Electric gear:** 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.  
**Standard supply:** With base and anchor bolts to bury. Supplied with socket-pin connector for quick installation and air recycle valve.  
**Regulations:** Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK10 degree of protection in compliance with EN 60529 standards. They have obtained ENEC European Certificate of Conformity.  
 Non-polluting louvre, ideal for installation in zone 3 (UNI10819).

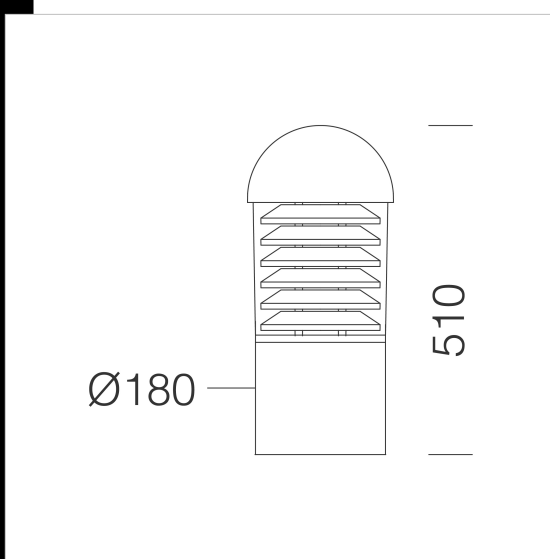

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
510238-00	CNR-L	3.80	SAP-E 70-5600lm-2000K-Ra 4	82 W	E27	GRAPHITE
510206-00	CNR-L	5.11	SAP-E 70-5600lm-2000K-Ra 4	82 W	E27	GREY9007
510203-00	S	3.00	MAX 75---	0 W	E27	GRAPHITE
510207-08	CELL	4.07	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GREY9007
510204-00	S	3.85	MAX 75---	0 W	E27	GREY9007
510205-00	CNR-L	5.22	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GREY9007
510239-08	CELL	4.07	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GRAPHITE
510236-00	CNR-L	3.80	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GRAPHITE

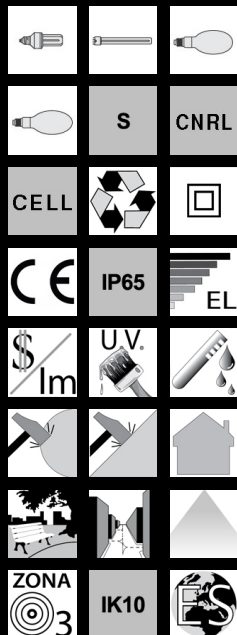

### Download

- DXF 2D  
- 1232c.dxf
- 3DS  
- disano\_1232\_faro.3ds
- 3DM  
- disano\_1232\_faro.3dm
- Montaggi  
- faro\_faro3\_faro4\_tn.pdf  
- 1232.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated