

1234 Faro

Housing: In extruded aluminium, cylindrical section, Ø 180.
Diffuser: In vandal resistant and V2 self-extinguishing opal polycarbonate, UV-stabilized.

Louvre: Baffle louvre in die-cast aluminium.

Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.


Lampholder: In white polycarbonate, with phosphor bronze contacts (FLC), socket 2G11. In ceramics with silver-plated contacts. Socket E27.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.

Standard supply: Steel flange to be sunk underground.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP44IK10 degree of protection in compliance with EN 60529 standards. They have obtained ENEC European Certificate of Conformity.

Non-polluting louvre, ideal for installation in zone 3 (UNI10819).

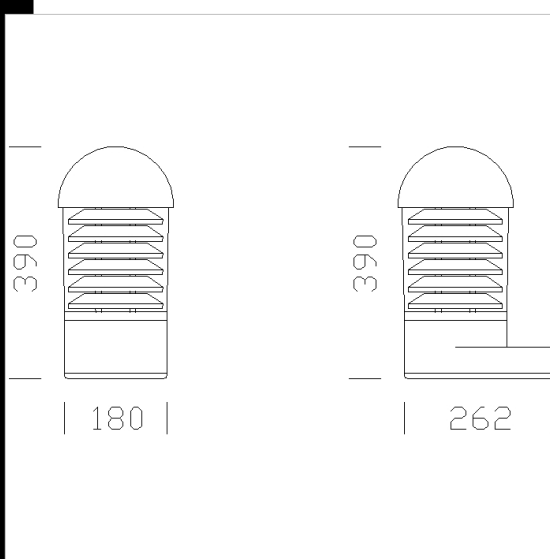

Download

DXF 2D
- 1234fr.dxf
3DS
- disano_1234_faro.3ds
3DM
- disano_1234_faro.3dm
Montaggi
- faro_faro3_faro4_tn.pdf
- 1234.dxf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
510404-00	S	2,90	MAX 75---	0 W	E27	GREY9007
510403-00	S	3,10	MAX 75---	0 W	E27	GRAPHITE
510407-08	CELL	3,30	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GREY9007
510401-08	CELL	3,18	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GRAPHITE
510405-00	CNR-L	4,36	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GREY9007
510438-00	CNR-L	4,28	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated