



## 1234 Faro



Housing: In extruded aluminium, cylindrical section, Ø 180.  
 Diffuser: In vandal resistant and V2 self-extinguishing opal polycarbonate, UV-stabilized.  
 Louvre: Baffle louvre in die-cast aluminium.  
 Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
 Lampholder: In white polycarbonate, with phosphor bronze contacts (FLC), socket 2G11. In ceramics with silver-plated contacts. Socket E27.  
 Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.  
 Standard supply: Steel flange to be sunk underground.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP44IK10 degree of protection in compliance with EN 60529 standards. They have obtained ENEC European Certificate of Conformity.  
 Non-polluting louvre, ideal for installation in zone 3 (UNI10819).

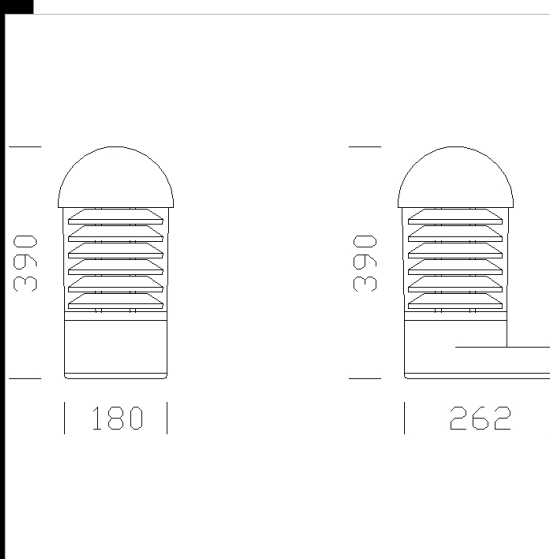

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
510404-00	S	2,90	MAX 75---	0 W	E27	GREY9007
510403-00	S	3,10	MAX 75---	0 W	E27	GRAPHITE

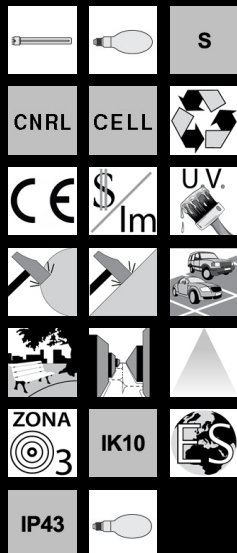

### Download

- DXF 2D  
- 1234fr.dxf
- 3DS  
- disano\_1234\_faro.3ds
- 3DM  
- disano\_1234\_faro.3dm
- Montaggi  
- faro\_faro3\_faro4\_tn.pdf  
- 1234.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated