

1235 Faro



Housing: In extruded aluminium, cylindrical section, Ø 180.
Diffuser: In vandal resistant and V2 self-extinguishing opal polycarbonate, UV-stabilized.


Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Lampholder: In white polycarbonate, with phosphor bronze contacts (FLC), socket 2G11. In ceramics with silver-plated contacts. Socket E27.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.

Standard supply: Steel flange to be sunk underground.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP44IK10 degree of protection in compliance with EN 60529 standards. They have obtained ENEC European Certificate of Conformity.

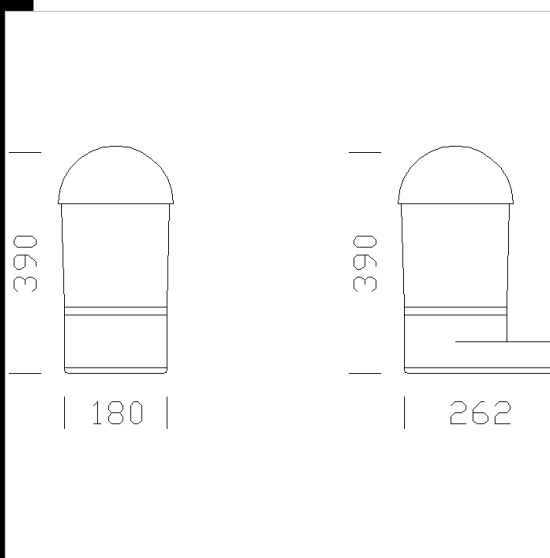

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
510503-00	S	2,66	MAX 75---	0 W	E27	GRAPHITE
510504-00	S	2,62	MAX 75---	0 W	E27	GREY9007



Download

DXF 2D
- 1235fr.dxf

3DS
- disano_1235_faro.3ds

3DM
- disano_1235_faro.3dm

Montaggi
- faro_faro3_faro4_tn.pdf
- 1235.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated