

## 1235 Faro



Housing: In extruded aluminium, cylindrical section, Ø 180.  
Diffuser: In vandal resistant and V2 self-extinguishing opal polycarbonate, UV-stabilized.


Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Lampholder: In white polycarbonate, with phosphor bronze contacts (FLC), socket 2G11. In ceramics with silver-plated contacts. Socket E27.


Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.

Standard supply: Steel flange to be sunk underground.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP44IK10 degree of protection in compliance with EN 60529 standards. They have obtained ENEC European Certificate of Conformity.

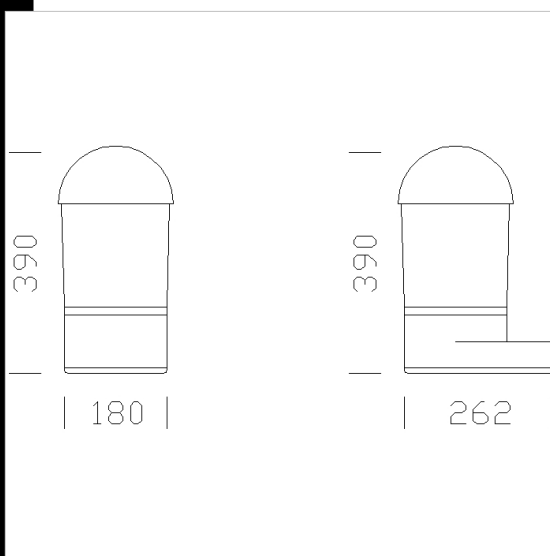

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
510503-00	S	2,66	MAX 75---	0 W	E27	GRAPHITE
510538-00	CNR-L	4,00	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GRAPHITE
510505-00	CNR-L	3,98	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GREY9007
510539-08	CELL	2,80	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GRAPHITE
510506-08	CELL	2,74	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GREY9007
510504-00	S	2,62	MAX 75---	0 W	E27	GREY9007

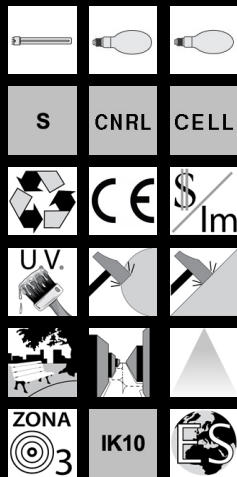

### Download

DXF 2D  
- 1235fr.dxf

3DS  
- disano\_1235\_faro.3ds

3DM  
- disano\_1235\_faro.3dm

Montaggi  
- faro\_faro3\_faro4\_tn.pdf  
- 1235.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated