


1796 Faro 5 LED - short version



Housing: In extruded aluminium, cylindrical section, Ø 180.  
 Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized.  
 Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK10 degree of protection in compliance with EN 60529 standards.  
 Standard supply: with air recycle valve. Supplied with socket-pin connector for quick installation  
 Working life: 80%: 50000h (L80B20) (from -30° to +50° C - Tj=25°C).

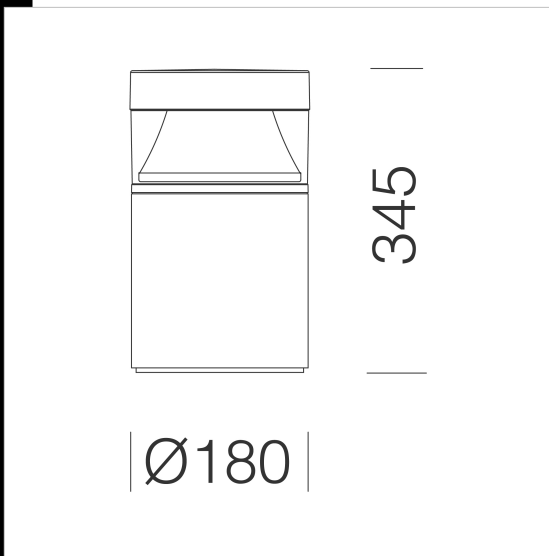

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
510620-00	CLD	3,28	LED-775lm-4000K-CRI 80	7 W	GRAPHITE
510620-39	CLD	3,28	LED-720lm-3000K-CRI 80	8 W	GRAPHITE



Download

- DXF 2D  
- 1796x.dxf
- 3DS  
- disano\_1796\_faro\_5.3ds
- 3DM  
- disano\_1796\_faro\_5.3dm
- Montaggi  
- faro-4-5 07-20.pdf
- BIM  
- 1796 Faro 5 LED - short version - 20200528.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated