




**Download**

- DXF 2D  
- 1875.dxf
- 3DS  
- disano\_1875\_portofino.3ds
- 3DM  
- disano\_1875\_portofino.3dm
- Montaggi  
- portofino.pdf
- BIM  
- 1875 Portofino - medium version - 20200611.zip



**1875 Portofino - medium version**

Housing: In aluminium.  
 Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized.  
 Painting: cycle de peinture liquide standard, par immersion, se compose de plusieurs phases : une première phase de prétraitement superficiel du métal, une couche de peinture cataphorèse résistante à la corrosion et au brouillard salin, une couche finale de peinture liquide acrylique bi-composante stabilisée aux rayons UV.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP degree of protection in compliance with EN 60529 standards.  
 Standard supply: with air recycle valve. Supplied with socket-pin connector for quick installation  
 Power factor: >= 0.9.  
 life 50.000h to 70% L70B50  
 Photobiological safety class: exempt group EN62471

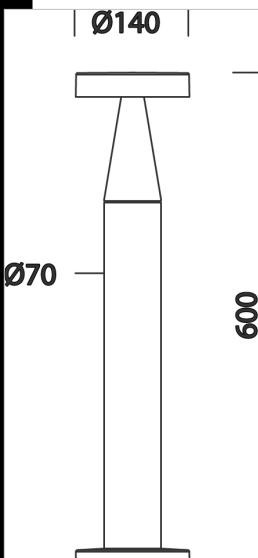

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
511150-00	CLD	1.64	LED-801lm-4000K-CRI>80	10 W	GRAPHITE
511150-2191	CLD	1.65	LED-801lm-4000K-CRI>80	10 W	CORTEN
511150-39	CLD	1.66	LED-1270lm-3000K-CRI>80	10 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated