





**Download**

- DXF 2D  
- 1873.dxf
- 3DS  
- disano\_1873\_portofino.3ds
- 3DM  
- disano\_1873\_portofino.3dm
- Montaggi  
- portofino.pdf
- BIM  
- 1873 Portofino - wall mounting - 20200611.zip

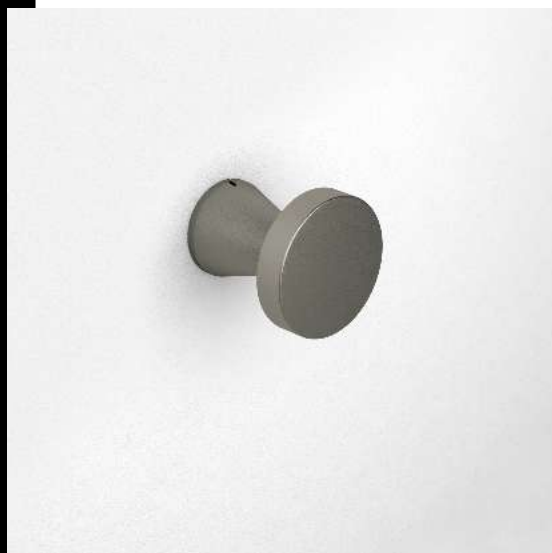

**1873 Portofino - wall mounting**

Housing: In aluminium.  
 Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized.  
 Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP degree of protection in compliance with EN 60529 standards.  
 Standard supply: with air recycle valve. Supplied with socket-pin connector for quick installation  
 Power factor: >= 0.9.  
 life 50.000h to 70% L70B50  
 Photobiological safety class: exempt group EN62471

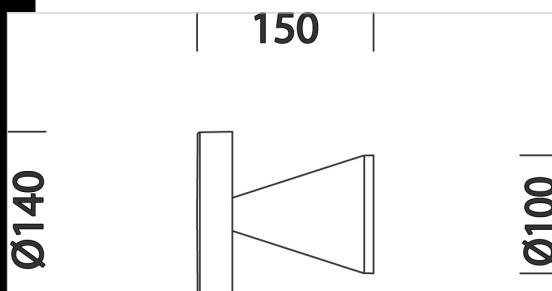

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
511160-00	CLD CELL	0,80	LED-801lm-4000K-CRI>80	10 W	GRAPHITE
511160-2191	CLD CELL	0,81	LED-801lm-4000K-CRI>80	10 W	CORTEN
511160-39	CLD CELL	0,80	LED-745lm-3000K-CRI>80	10 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated