

Download

DXF 2D
- 1871h.dxf

BIM
- 1871 Portofino - wall mounting -
20200611.zip



1871 Portofino - wall mounting

Housing: In aluminium.

Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized.

Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.


Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP degree of protection in compliance with EN 60529 standards.

Standard supply: with air recycle valve. Supplied with socket-pin connector for quick installation

Power factor: ≥ 0.9 .

life 50.000h to 70% L70B50

Photobiological safety class: exempt group EN62471

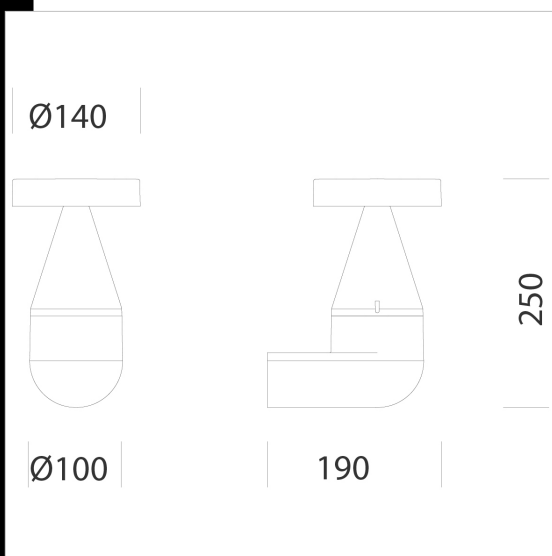

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
511165-00	CLD	1,29	LED-801lm-4000K-CRI>80	10 W	GRAPHITE
511165-39	CLD	1,27	LED-1270lm-3000K-CRI>80	10 W	GRAPHITE
511166-00	CLD CELL	1,29	LED-801lm-4000K-CRI>80	10 W	WHITE
511166-39	CLD CELL	1,27	LED-745lm-3000K-CRI>80	10 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated