

## 1877 Portofino - wall mounting



Housing: In aluminium.

Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized.

Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP degree of protection in compliance with EN 60529 standards.

Standard supply: with air recycle valve. Supplied with socket-pin connector for quick installation

Power factor:  $\geq 0.9$ .

life 50.000h to 70% L70B50

Photobiological safety class: exempt group EN62471



### Download


DXF 2D  
- 1877.dxf

3DS  
- disano\_1877\_portofino.3ds

3DM  
- disano\_1877\_portofino.3dm

Montaggi  
- portofino.pdf

BIM  
- 1877 Portofino - wall mounting - 20200611.zip

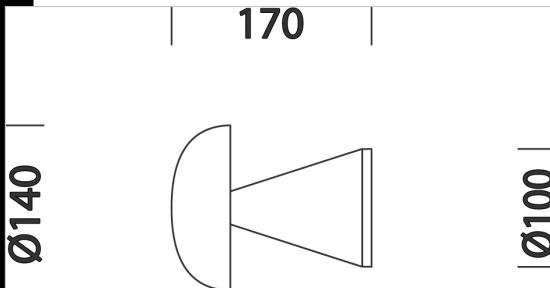

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
511170-00	CLD	0,85	LED-801lm-4000K-CRI>80	10 W	GRAPHITE
511170-39	CLD	0,88	LED-1270lm-3000K-CRI>80	10 W	GRAPHITE
511171-00	CLD CELL	0,86	LED-801lm-4000K-CRI>80	10 W	WHITE
511171-39	CLD CELL	0,88	LED-745lm-3000K-CRI>80	10 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated