




**1841 Bitta 2 LED - wall mounting**

Apart from the purely functional purpose, outdoor lighting also has an aesthetic function. A lighting fixture with small dimensions and the proper light beam angle can create amazing and stylish light effects. This product was studied as a free-standing fixture equipped with a steel column or as a wall-mounted device. It also features great usage versatility and highly efficient and advanced technology for LED

Housing/Base: in die-cast aluminium.  
Diffuser: opal, shatterproof and self-extinguishing V2 polycarbonate, UV-stabilized.

Standard supply: the wall version comes with mounting connection.  
Working life: 40000 h (from -20° a +40° C - Ta=25°C).  
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

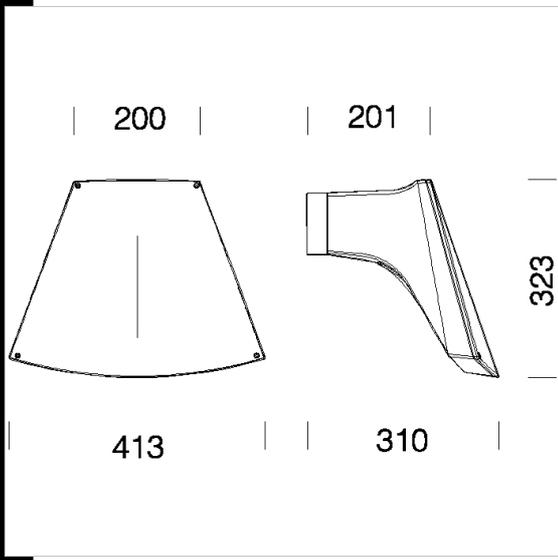

- Download**
- DXF 2D  
- 1843.dxf
  - 3DS  
- disano\_1841\_bitta\_2\_wall.3ds
  - 3DM  
- disano\_1841\_bitta\_2\_wall.3dm
  - Montaggi  
- bitta led 07-20.pdf
  - BIM  
- 1841 Bitta 2 - wall mounting - LED - Grey - 20200616.zip  
- 1841 Bitta 2 - wall mounting - LED - Graphite - 20200616.zip  
- 1841 Bitta 2 - wall mounting - LED - Anthracite - 20200616.zip  
- 1841 Bitta 2 - wall mounting - LED - Corten - 20200616.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
511440-2191	CLD CTL	3.20	LED-549lm-4000K-CRI>80	21 W	CORTEN
511441-00	CLD	2.68	LED-549lm-4000K-CRI>80	10 W	GRAPHITE
511442-00	CLD	2.68	LED-549lm-4000K-CRI>80	10 W	ANTHRACITE
511440-00	CLD	2.68	LED-549lm-4000K-CRI>80	10 W	GREY9007

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated