

Download

DXF 2D
- 1853.dxf
Montaggi
- 369_399 montaggio.dxf
- floor_2011.pdf



1853 Floor - swivelling - FL

Housing/Frame: in die-cast aluminium.

Diffuser: clear tempered glass, resistant to thermal shock, impacts and static loads. For versions with CDM lamps and double glass.

Frame coating: in several stages. The first stage includes a grey epoxy cationic electro coating, resistant to corrosion and saline environments. Then it is coated with a UV stabilising primer; and finally it is finished with graphite acrylic paint.

Electric gear: Hard wire with 0.50 mm² cross section and PVC-HT sheath, resistant at 90C in compliance with CEI 20-20 standards for FLC versions; and flexible wire with silicone insulation and 1mm² fibreglass braid for discharge version.


Standard supply: complete with power supply cable. Supplied with outer case for recessed floor installation.

The fixture is composed of a luminaire and a nylon outer casing for recessed floor installation. The outer casing is designed to accept the power supply pipe (hole $\varnothing$ 40) at 2 points. The masonry must be able to support a load of 4000 kg without strain. As the bottom is open to allow for draining, a gravel bed should be prepared at the time of installation. The required wiring is incorporated inside the luminaire.

For usage information, please compare the fixture's characteristics with the system's specifications (EN 60598-2-13).

FL reflector: adjustable $\pm 20^\circ$, in aluminium 99,85, anodically oxidised and polished.

Upon request: version with IP68 protection with gel watertight system at the bottom of the fixture (not suited for underwater installation).

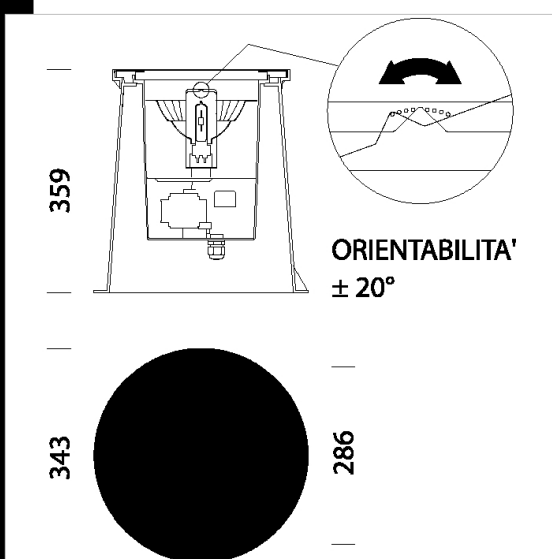

Code	Gear	Kg	Watt	Base	Lamps	Colour
530031-00	CNR-L	7,00	CDM-T 70	G12	6600lm-3000K-Ra 1b	GRAPHITE
530032-00	CELL	6,00	CDM-T 50 elite	G12	5500lm-3000K-Ra 90	GRAPHITE
530030-00	CNR-L	7,00	CDM-T 35	G12	3500lm-3000K-Ra 1b	GRAPHITE

Accessories



- 369 connector



- 399 Connector for solid line



- 144 -