


1856 Floor - swivelling in stainless steel AISI 316 - FS



Housing/Cover: in die-cast aluminium.  
 Frame: in AISI 316L stainless steel.  
 Diffuser: clear tempered glass, resistant to thermal shock, impact and static loads. For versions with CDM lamps and double glass.  
 Electric gear: Hard wire with 0.50 mm<sup>2</sup> cross section and PVC-HT sheath, resistant at 90°C in compliance with CEI 20-20 standards for FLC versions; and flexible wire with silicone insulation and 1mm<sup>2</sup> fibreglass braid for discharge version.  
 Standard supply: complete with power supply cable. Supplied with outer case for recessed floor installation.  
 The fixture is composed of a luminaire and a nylon outer casing for recessed floor installation. The outer casing is designed to accept the power supply pipe (hole Ø 40) at 2 points. The masonry must be able to support a load of 4000 kg without strain. As the bottom is open to allow for draining, a gravel bed should be prepared at the time of installation. The required wiring is incorporated inside the luminaire.  
 For usage information, please compare the fixture's characteristics with the system's specifications (EN 60598-2-13).  
 FS reflector: adjustable to +/- 20°, in aluminium 99.85, anodically oxidised and polished. It comes with control ring to prevent glare.  
 Upon request: version with IP68 protection with gel watertight system at the bottom of the fixture (not suited for underwater installation)

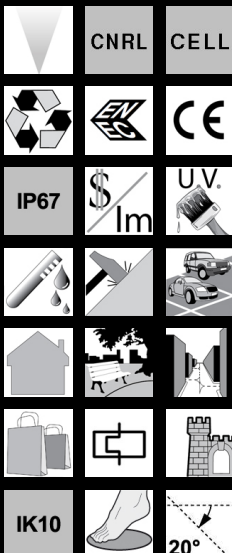

Download  
 DXF 2D  
 - 1851.dxf

Code	Gear	Kg	Watt	Base	Lamps	Colour
530060-00	CNR-L	6,00	CDM-T 35	G12	3500lm-3000K-Ra 1b	STAINLESS STEEL
530061-00	CNR-L	7,00	CDM-T 70	G12	6600lm-3000K-Ra 1b	STAINLESS STEEL
530062-00	CELL	6,14	CDM-T 50 elite	G12	5500lm-3000K-Ra 90	STAINLESS STEEL

Accessories



- 369 connector



- 399 Connector for solid line