




Download
DXF 2D
- 1685.dxf
Montaggi
- floorled.pdf
- connettore floor.dxf
BIM
- 1685 Floor - fixed - FS -
20200623.zip




1685 Floor - fixed - FS

Housing/Chassis: in die-cast aluminium. Frame: in AISI 316L stainless steel. Outer shell: in black nylon reinforced fibreglass. Reflector: in metalized polycarbonate. Diffuser: 15 mm tempered glass, resistant to thermal shocks, impacts and static load. Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised. Equipment: silicone rubber seal and screws in anti-grip stainless steel. Installation: the fixture was designed for the installation on the ground with an outer shell. Luminous flux maintenance 80% 50.000h (L80B20). Power factor 0.95.

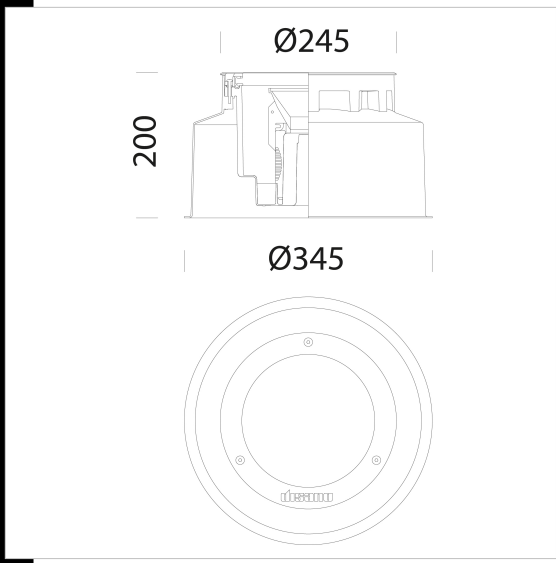

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530407-00	CLD	4.08	LED COB-2029lm-4000K-10°-CRI 90	28 W	STAINLESS STEEL
530407-73	CLD	4.12	LED COB AMBER-2272lm-2200K-10°-amber-	28 W	STAINLESS STEEL

Accessories

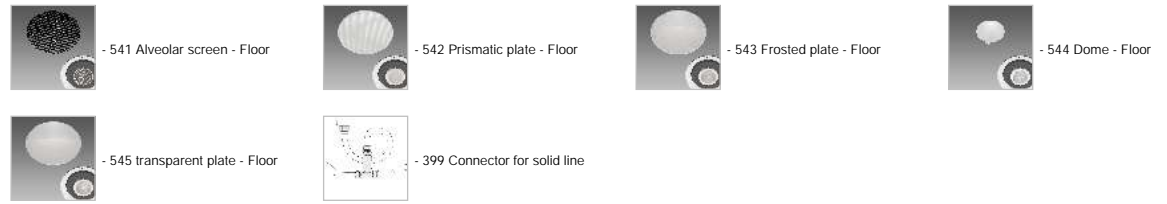

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated