

Download

DXF 2D
- 1685.dxf


Montaggi
- floorled.pdf
- connettore floor.dxf

BIM
- 1686 Floor - fixed - FL -
20200623.zip



1686 Floor - fixed - FL

Housing/Chassis: in die-cast aluminium. Frame: in AISI 316L stainless steel. Outer shell: in black nylon reinforced fibreglass. Reflector: in metalized polycarbonate. Diffuser: 15 mm tempered glass, resistant to thermal shocks, impacts and static load. Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, polyester powder coating. Equipment: silicone rubber seal and screws in anti-grip stainless steel. Installation: the fixture was designed for the installation on the ground with an outer shell. Luminous flux maintenance 80% 50.000h (L80B20). Power factor 0.95.

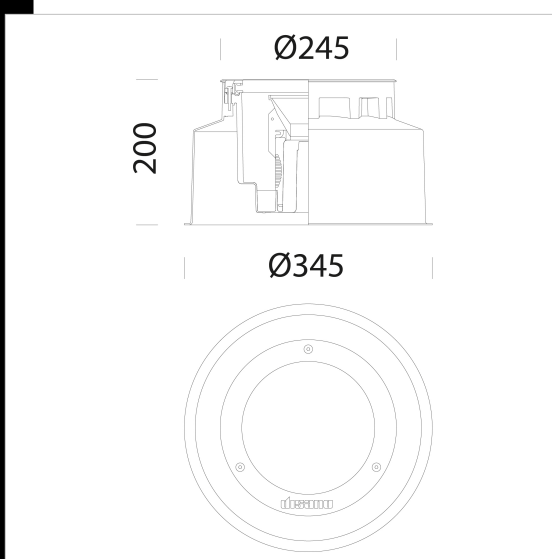

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530417-00	CLD	4.07	LED COB-2113lm-4000K-62°-CRI 90	28 W	STAINLESS STEEL
530417-73	CLD	4.18	LED COB AMBER-2367lm-2200k-62°-amber-	28 W	STAINLESS STEEL

Accessories



- 541 Alveolar screen - Floor



- 542 Prismatic plate - Floor



- 543 Frosted plate - Floor



- 544 Dome - Floor



- 545 transparent plate - Floor



- 399 Connector for solid line

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated