


1687 Floor - swivelling - FS


Housing/Chassis: in die-cast aluminium. Frame: in AISI 316L stainless steel. Outer shell: in black nylon reinforced fibreglass. Reflector: revolving with max. 0/+15° graduated brackets, in metalized polycarbonate. Diffuser: 15 mm tempered glass, resistant to thermal shocks, impacts and static load. Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, polyester powder coating. Equipment: silicone rubber seal and screws in anti-grip stainless steel. Installation: the fixture was designed for the installation on the ground with an outer shell where it can be rotated by 30° step angle. LED: Luminous flux maintenance 80% 50.000h (L80B20). Power factor 0.95.

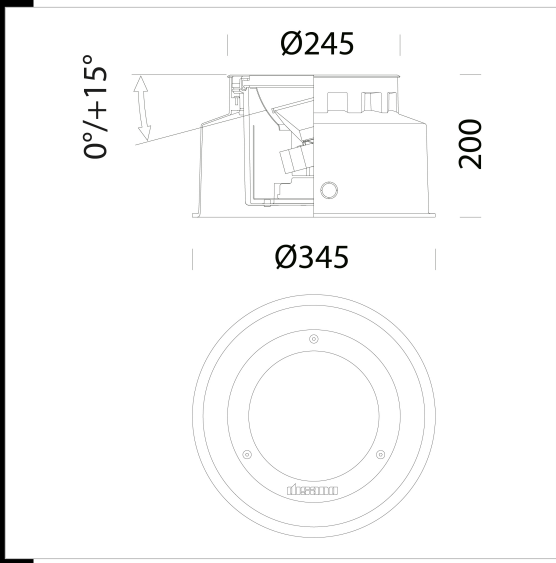


Download
DXF 2D
- 1687.dxf
Montaggi
- connettore floor.dxf
- floorled.pdf
BIM
- 1687 Floor - swivelling - FS - 20200623.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530427-00	CLD	4.14	LED COB-2029lm-4000K-10°-CRI 90	28 W	STAINLESS STEEL
530427-73	CLD	4.46	LED COB AMBER-2272lm-2200K-10°-amber-	28 W	STAINLESS STEEL


Accessories




- 541 Alveolar screen - Floor




- 542 Prismatic plate - Floor




- 543 Frosted plate - Floor



- 544 Dome - Floor



- 545 transparent plate - Floor



- 399 Connector for solid line

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated