

1603 Floor - with convex screen and frame for spotlighting

Housing: In diecast aluminium.

Reflector: In polished, anodized aluminium.

Diffuser: In hemispherical glass, resistant to thermal shocks, impacts and loading (max. 2000 kg).


Painting: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section and PVC-HT sheath or silicone wire terminated with quick-connect admiralty brass clamps, with glass braid, 1.0 sqmm cross section. 2P+T terminal block with maximum allowed lead cross section of 2.5 sqmm.

Supply: Versions with fixing frame and recess mounting box in fiberglass nylon.

Equipment: Silicone rubber gasket. Removable electric gear tray for easy maintenance. cable gland in fiberglass nylon Ø 1/2 gas thread.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP67IK08 degree of protection according to EN 60529 standards.

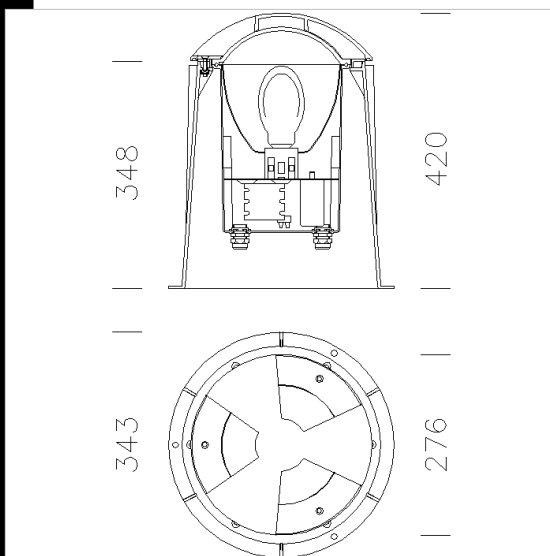

Download

DXF 2D
- 1603flr.dxf

Montaggi

- press.dxf
- mis_inc.dxf
- 1603.dxf
- 369_399_montaggio.dxf
- floor.pdf

Codice	Cablaggio	Kg	Lumen-K-CRI	WTot	Attacco base	Colore
530544-00	CELL	5.69	FLC 1x26T/E-1800lm-4000K-Ra 1b	0 W	Gx24q-3	GRAFITE

Accessori



- 369 connector



- 399 Connector for solid line

Il flusso luminoso riportato indica il flusso uscente dall'apparecchio con una tolleranza di $\pm 10\%$ rispetto al valore indicato. I W tot sono la potenza totale assorbita dal sistema e non supera il 10% del valore indicato.