


**1603 Floor - with convex screen and frame for spotlighting**

Housing: In diecast aluminium.  
 Reflector: In polished, anodized aluminium.  
 Diffuser: In hemispherical glass, resistant to thermal shocks, impacts and loading (max. 2000 kg).  
 Painting: In several stages. First stage: black epoxy cationic electrocoating dip, resistant to corrosive and salty environments. Second stage: UV ray stabilizing priming, and lastly rough finish with graphite acrylic coating.  
 Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section and PVC-HT sheath or silicone wire terminated with quick-connect admiralty brass clamps, with glass braid, 1.0 sqmm cross section. 2P+T terminal block with maximum allowed lead cross section of 2.5 sqmm.  
 Supply: Versions with fixing frame and recess mounting box in fiberglass nylon.  
 Equipment: Silicone rubber gasket. Removable electric gear tray for easy maintenance. cable gland in fiberglass nylon Ø 1/2 gas thread.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP67IK08 degree of protection according to EN 60529 standards.

**Download**  
 DXF 2D  
 - 1603flr.dxf  
 Montaggi  
 - mis\_inc.dxf  
 - 1603.dxf  
 - 369\_399\_montaggio.dxf  
 - press.dxf  
 - floor.pdf

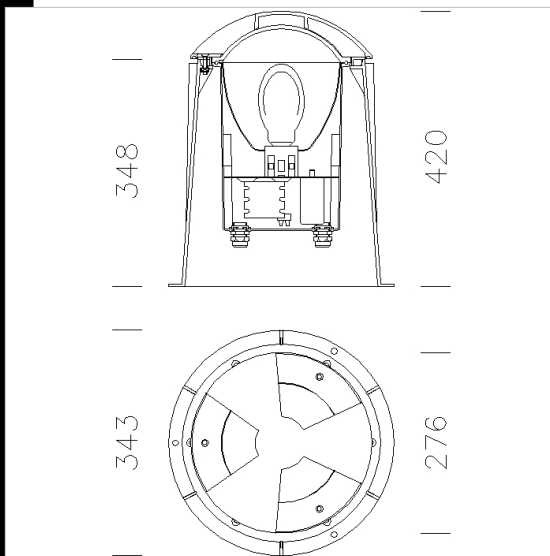

Code	Gear	Kg	Watt	Base	Lamps	Colour
530544-00	CELL	5,69	FLC 1x26T/E	Gx24q-3	1800lm-4000K-Ra 1b	GRAPHITE
530546-00	CNR-L	0,00	SAP-T 50	E27	3400lm-2000K-Ra 4	GRAPHITE
530545-00	CNR-L	0,00	MBF 50	E27	1800lm-4000K-Ra 3	GRAPHITE

**Accessories**



- 369 connector



- 399 Connector for solid line