


1644 Floor - Con schermo bombato chiuso da un lato

Housing/frame: In diecast aluminium.
 Reflector: in polished, anodized aluminium.
 Diffuser: In hemispherical glass, resistant to thermal shocks, impacts and loads (max. 2000 kg).
 Painting: In several stages. First stage: black epoxy cationic electrocoating dip, resistant to corrosive and salty environments. Second stage: UV ray stabilizing priming, and lastly rough finish with graphite acrylic coating.
 Lampholder: In ceramics, with silver plated contacts. Socket E27; G24d-3.
 Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section and PVC-HT sheath or silicone wire terminated with quick-connect admiralty brass clamps, with glass braid, 1.0 sqmm cross section. 2P+T terminal block with maximum allowed lead cross section of 2.5 sqmm.
 Standard supply: Versions with fixing frame and recess mounting box in fiberglass nylon.
 Equipment: Silicone rubber gasket. Removable electric gear tray for easy maintenance. cable gland in fiberglass nylon Ø 1/2 gas thread.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP67IK08 degree of protection according to EN 60529 standards.

Download

DXF 2D
 - 1602flr.dxf
 Montaggi
 - 369_399 montaggio.dxf

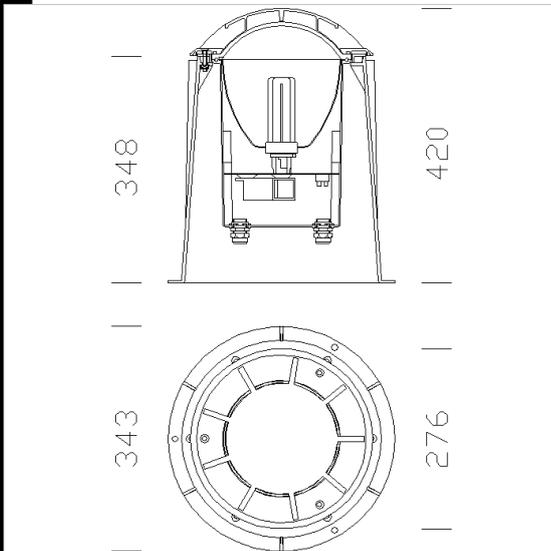

Code	Gear	Kg	Watt	Base	Lamps	Colour
530563-00	CNR-L	7,00	SAP-T 50	E27	3400lm-2000K-Ra 4	GRAPHITE
530561-00	CNR-L	6,50	FLC 1x26T	G24d-3	1800lm-4000K-Ra 1b	GRAPHITE

Accessories



- 369 connector



- 399 Connector for solid line