



IP43

Download

- DXF 2D
- 1619_powerled.dxf
- Montaggi
- 1619_mini_01-09.pdf



1619 Mini - LED wall rectangular version

Housing/frame: In diecast aluminium.


Diffuser: In tempered glass, thermal shock and impact resistant.

Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Equipment: Silicone rubber and EPDM gasket .

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP54IK08 degree of protection according to EN 60529 standards.

Mini is equipped with 1 LED da 1.15W (140lm white - 20°) and color temperature of 4000K. Complete with transformer 350mA

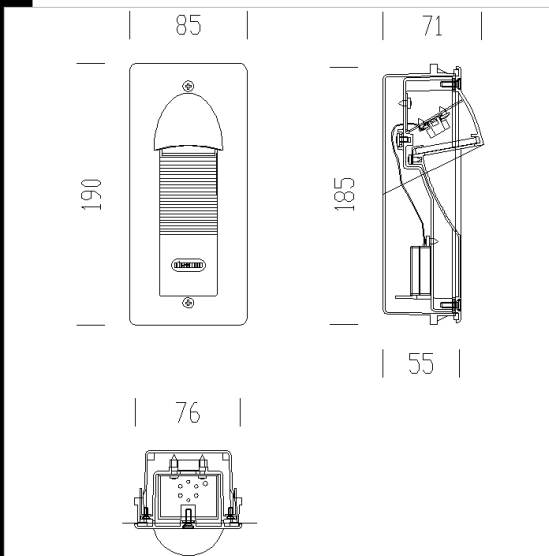

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated