



1674 Starled - rectangular version

Housing: Vandal resistant fibreglass nylon,  
 Frame: Die-cast aluminium.  
 Diffuser: Frosted glass, resistant to impact and thermal shock .  
 Coating:the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
 Electric gear: 24V 230V/50Hz power supply with external transformer acc.179. Wire insulation class 3.  
 Equipment: Rubber gasket.  
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with EN 60529 standard.  
 Separate transformer required (code 997663 max 4 spot)

3° IP  
IK

  IP67


 U.V. 

 ZONA 1  IK08

 RGO 

CLD S+L 

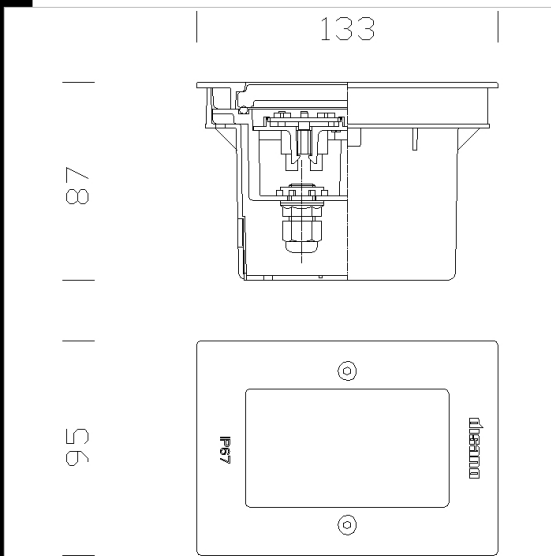

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530692-00	CLD S+L	0.31	LED white 0.6W-60lm-4000K-	2 W	GREY9007
530693-00	CLD S+L	0.32	LED white 0.6W-60lm-4000K-	2 W	GRAPHITE

Accessories



- 179 watertight box CC-IP677

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated