




Download
DXF 2D
- 1623.dxf
Montaggi
- starled.dxf
- 1673.pdf



1673 Starled - rectangular version 230v

Housing: Vandal resistant fibreglass nylon,
Frame: Die-cast aluminium.
Diffuser: Frosted glass, resistant to impact and thermal shock .
Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

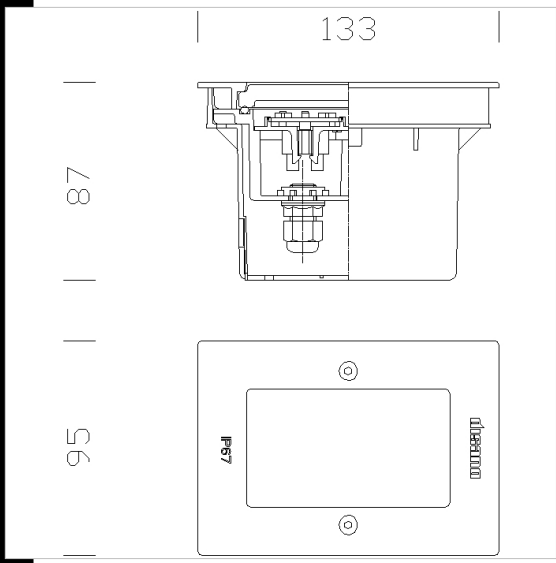

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530697-00	CLD	0.41	LED-43lm-4000K-120°-CRI>80	1 W	GREY9007
530696-00	CLD	0.41	LED-43lm-4000K-120°-CRI>80	1 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated