


### 1640 Minifloor - swivelling

**HOUSING:** In die-cast aluminium with AISI 316 stainless steel frame.  
**REFLECTOR:** Swivelling, in anodised and polished aluminium.  
**DIFFUSER:** Twin protection, one in 5 mm thick smooth, clear, hardened glass mm and one in 12 mm resistant to thermal shock, impact and loads (max. 2000 Kg).  
**PAINTING:** With polyester powder, silver, upon chromate treatment, resistant to corrosive and saline environments.  
**LAMPHOLDER:** In ceramics with silver-plated contacts.  
**ELECTRIC GEAR:** 230V/50Hz power supply. Hard wire, 1 sq mm cross-section and PVC-HT sheath, resistant up to 90°C according to CEI 20-20 standards.  
**2P terminal block** with maximum allowed lead cross-section of 4 sq mm.  
**STANDARD SUPPLY:** Versions complete with clamping frame. Box for recess mounting supplied as standard.  
**EQUIPMENT:** Silicone rubber gasket. Removable electric control gear tray for easy maintenance.  
 Two diam. 1/2 inch gas thread f.g. nylon cable glands.  
**REGULATIONS:** Manufactured according to applicable EN60598 - CEI 34-21 standards. Level of protection in compliance with the EN60529 standard.

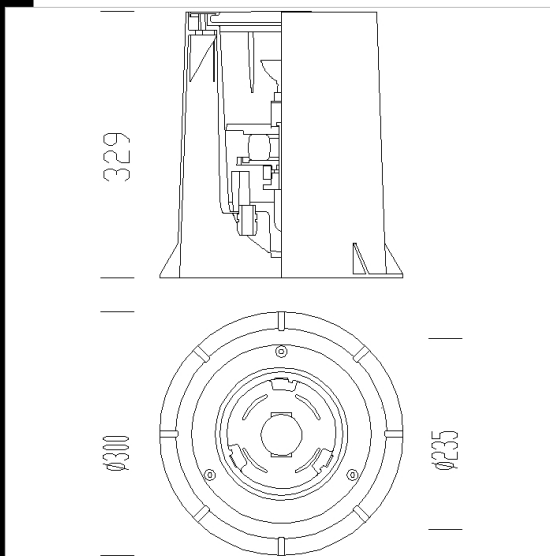

- Download**  
 DXF 2D  
 - 1640.dxf  
 3DS  
 - 1640\_minifloor.3ds  
 3DM  
 - 1640\_minifloor.3dm  
 Montaggi  
 - minifloor.pdf  
 - 369\_399\_montaggio.dxf

Code	Gear	Kg	Watt	Base	Lamps	Colour
530722-00	CTL	5,43	ALO 50	GY6.35	950cd-2900K-Ra 100	STAINLESS STEEL
530720-00	S	4,63	PAR30 75W	E27	2200cd-3000K-Ra 1a	STAINLESS STEEL
530723-00	CTL	5,45	DICR 35 IRC	GU5.3	4100cd-3000K-	STAINLESS STEEL
530733-00	CNR-L	5,75	CDM-R111 35	Gx8.5	1350lm-3000K-Ra 1b	STAINLESS STEEL
530721-00	CTL	5,50	AR111 50IRC	G53	5800cd-3000K-Ra 100	STAINLESS STEEL
530734-00	CELL	4,75	CDM-R111 20	Gx8.5	4500cd-3000K-Ra 1b	STAINLESS STEEL

#### Accessories



- 369 connector



- 399 Connector for solid line