




Download

DXF 2D
- 1642.dxf
3DS
- 1640_minifloor.3ds
3DM
- 1640_minifloor.3dm
Montaggi
- 1642minifloor.dxf
- minifloor.dxf
- 1642.pdf

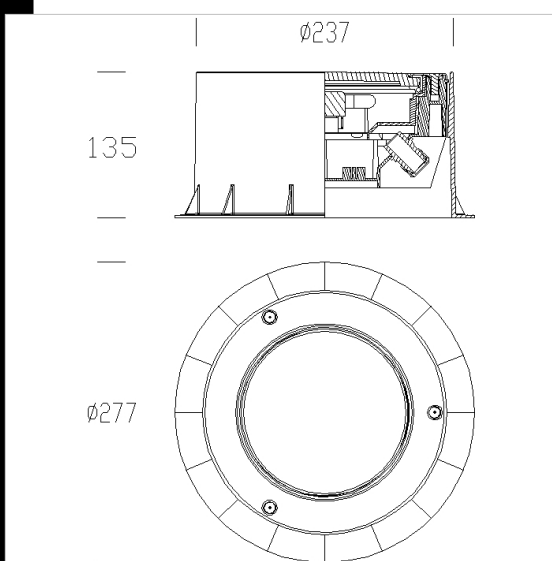

1642 Minifloor

HOUSING: In polycarbonate with AISI 316 stainless steel frame.
REFLECTOR: In anodised and polished aluminium.
DIFFUSER: Diffuser: smooth, clear tempered glass protection, thickness 12 mm, resistant to thermal shock, impact, and load. (max. 2000 kg).
LAMPHOLDER: In polycarbonate, with phosphor bronze contacts Socket G23
ELECTRIC GEAR: 230V/50Hz power supply. Hard wire, 1 sq mm cross-section and PVC-HT sheath, resistant up to 90°C according to CEI 20-20 standards. 2P terminal block with maximum allowed lead cross-section of 2.5 sq mm.
STANDARD SUPPLY: Versions complete with clamping frame. Box for recess mounting supplied as standard.
EQUIPMENT: Silicone rubber gasket. Removable electric control gear tray for easy maintenance.
Two diam. ½ inch gas thread f.g. nylon cable glands.
REGULATIONS: Manufactured according to applicable EN60598 - CEI 34-21 standards. Level of protection IP67IK08 in compliance with the EN60529 standard. Double insulation class.
LAMP: Complete with FLC7S- 4000K energy saving lamp

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
530740-00	CELL	2.87	FLC 2x7S/E-400lm-4000K-Ra 1b	15 W	G23	STAINLESS STEEL

Accessories



- 169 coloured glass

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated