


Download
DXF 2D
- 1870.dxf
Montaggi
- midifloor.pdf



1870 Midifloor - swivelling

Housing: Fibreglass nylon.
Diffuser: Tempered glass, resistant to impact and thermal shock .
Frame: Made of stainless steel (AISI 316).
Use cod 530782-00 with acc. 179 (cod 997667-00). Max 2 spots
Use cod 530784-00 with acc. 179 (cod 997662-00). Max 5 spots

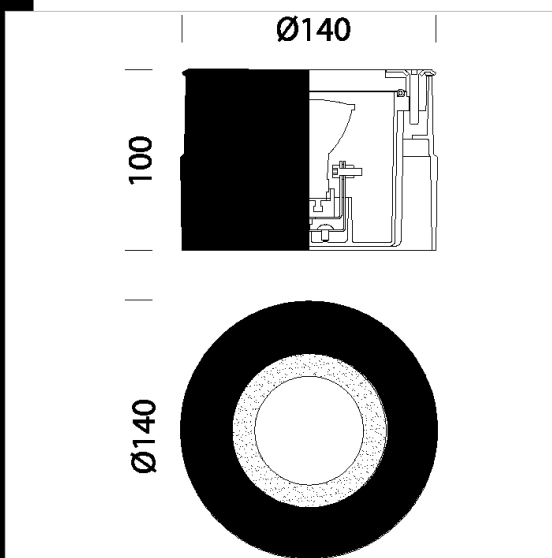

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
530782-00	S+L	1.05	CDM-R mini 20-1080lm-3000K-Ra 1b	0 W	Gx10	STAINLESS STEEL
530784-00	S+L	1.07	DICR 20-294lm--	0 W	GX5.3	STAINLESS STEEL

Accessories



- 179 watertight box CC-IP677

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated