




1871 Midifloor LED fullcolor - swivelling

Housing: made in die-cast aluminum with fibreglass nylon outer shell. Max 3000kg.
 Diffuser: Tempered glass, resistant to impact and thermal shock .
 Frame: Made of stainless steel (AISI 316L).
 Equipment: Silicone rubber and EPDM gasket.
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.
 Photobiological safety class: exempt group

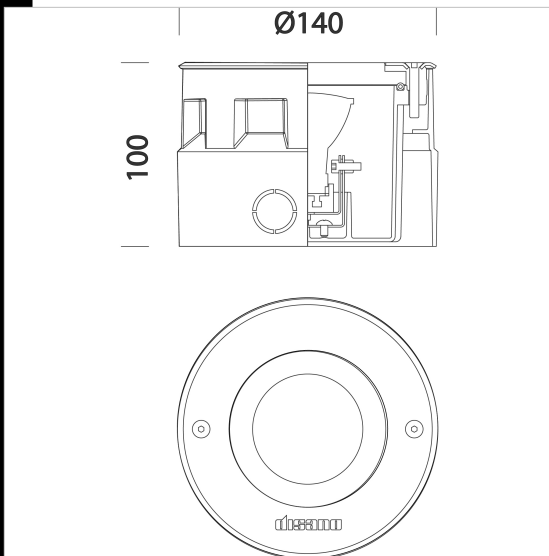

Download

- DXF 2D
- 18711872.dxf
- Montaggi
- midifloor 05-21.pdf
- BIM
- 1871 Midifloor LED fullcolor - swivelling - 20200611.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530790-00	CLD S+L	1.07	LED RGB Fullcolor-105lm--	4 W	STAINLESS STEEL

Accessories



- 61 box- IP65



- 64 IRE receiver



- 62 Amplifier/ remodulator DMX



- 63 IP65 box - LED RGB power



- 65 RGB remote

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated