


1645 Maxifloor - wide beam reflector

HOUSING: In die-cast aluminium.
REFLECTOR: Wide-beam in anodised and polished aluminium.
DIFFUSER: 5mm. thick, double glazing, clear, single-press tempered glass; resistant to thermal shock, impact and load (max. 2000 kg). Lens shaped.
PAINTING: Grey graphite polyester powder applied; resistant to corrosion and briny mist.
LAMPHOLDER: In ceramics with silver-plated contacts.
ELECTRIC GEAR: 230V/50Hz power supply. Silicone wired terminated with quick connect clamps in admiralty brass, fibreglass braid, 1 sq. mm cross-section. 2P terminal block with maximum allowed lead cross-section of 2.5 sq mm.
STANDARD SUPPLY: Versions complete with clamping frame. Box for recess mounting supplied as standard.
EQUIPMENT: Silicone rubber gasket. Two $\text{AE } \frac{1}{2}$ inch gas thread f.g. nylon cable glands.
REGULATIONS: Manufactured according to applicable EN60598 - CEI 34-21 standards. Level of protection in compliance with the EN60529 standard

Download

- DXF 2D
- 1645_6_7.dxf
- Montaggi
- 1645_6_7_maxifloor.pdf
- maxi2.dxf
- acc_170_installazione.dxf
- maxi3.dxf
- maxi1.dxf

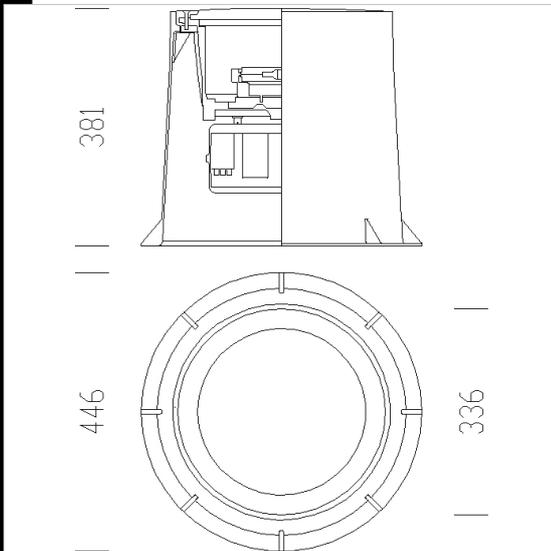

Code	Gear	Kg	Watt	Base	Lamps	Colour
530823-00	CNR-L	11,00	SAP-TS 70	Rx7s	6800lm-2000K-Ra 4	GRAPHITE
530822-00	CNR-L	11,43	JM-TS 150	Rx7s	12500lm-4200K-Ra 1b	GRAPHITE