



Download

DXF 2D

- 1638.dxf

Montaggi

- 1622-1637-1638.pdf



1638 Starled LED - Cross

Housing: Vandal resistant fibreglass nylon,.

Frame: Die-cast aluminium.

Diffuser: Frosted glass, resistant to impact and thermal shock .


Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Electric gear: 350mA 230V/50Hz power supply with external transformer acc.179.Wire insulation class 3.

Equipment: Rubber gasket.

Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with EN 60529 standard.

Separate transformer required (code 997665-00 max 12 spot)

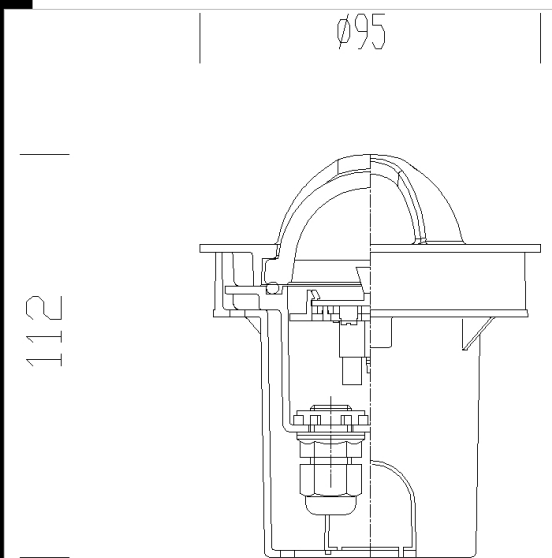

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530871-00	CLD S+L	0,14	LED-67lm-4000K-CRI 75	1 W	GRAPHITE
530870-00	CLD S+L	0,14	LED-67lm-4000K-CRI 75	1 W	GREY9007

Accessori



- 179 watertight box CC-IP677

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated