
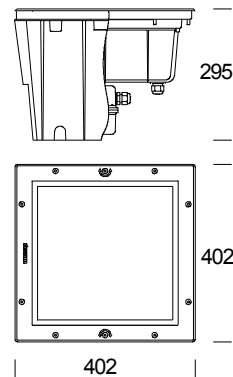


1832 Quadro di luce - LED RGB

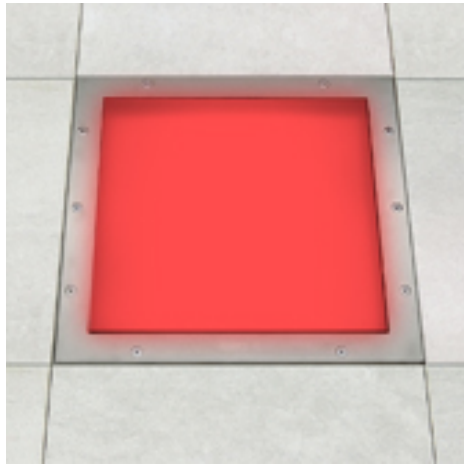

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
530991-00	CLD CTL	12.00	stainless	402x402x295	32	LED RGB Fullcolor-105lm

Housing: in die-cast aluminium with silver powder coating.

Frame: AISI 304 stainless steel.

Outer casing: nylon outer casing and terminal block. Separate wiring to reduce thermal shock on the components and to simplify the installation.

Diffuser: internal tempered glass, 5 mm thick, resistant to thermal shock. External tempered glass, 15 mm thick, resistant to thermal shock and mechanical stress up to 2000 Kg (non-slip version available upon request).

Electric gear: 230V/50Hz power supply. Nylon gear box with 4P 4 sq mm terminal block. Provision for in-out wire, 1/2 inch nylon cable glands and 1 sq mm section double insulation wire.

Standard supply: silicone rubber gaskets.

LED 8X4W RGB Fullcolor - White 8x105lm

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.