


## 7203 Serena - Direct/indirect light

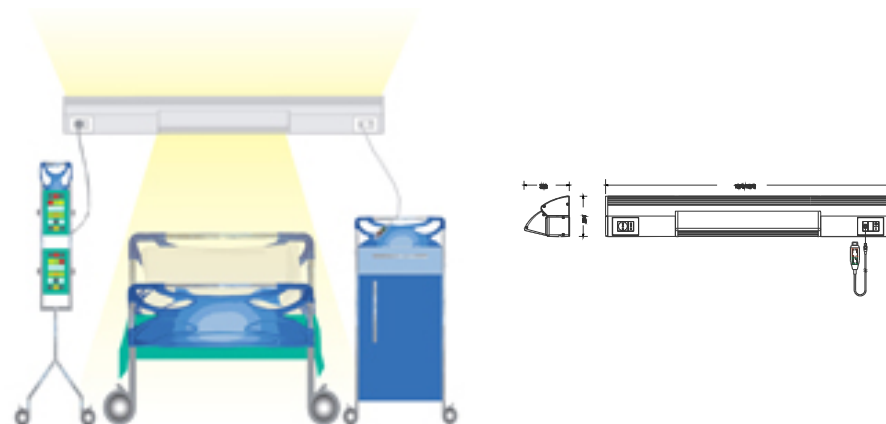

Code	Gear	Colour	Dimensions	lamp
720334-00	CELL-F	white	1276x220x274	FL 2x14-G5-1250lm-4000K-Ra 1b FL 2x28-G5-2650lm-4000K-Ra 1b
720335-00	CELL-F	white	1576x220x274	FL 2x14-G5-1250lm-4000K-Ra 1b FL 2x35-G5-3350lm-4000K-Ra 1b

**Power cable trunking:** Carrying profile in extruded aluminium and side end caps in die-cast aluminium, without sharp edges and corners. Self-extinguishing cable trunkings, with separations for high and low power supplies.

**Light luminaires:** Housing in extruded aluminium and side end caps in die-cast aluminium, polished aluminium reflector, vandal resistant antiglare plexiglass diffuser. Equipped with linear or compact fluorescent lamps, one or two-lamp versions.

**Medical gases:** Upper channel section designed to mount gas box. Sized according to the number of gas boxes required. Installation at a minimum distance of 50 cm from electric sockets. Disano only supplies a prearranged solution for the installation of medical gas carrier pipes.

**Coating:** White epoxy-polyester powder coating, resistant to corrosive and saline environments (it has passed the UNI ISO 9227 1000 hr test). Available in different RAL colours, on request.

**Mounting:** Installation takes place in two stages:

- Fastening of support plates
- Positioning of power supply trunking and luminaires.

**Accessories:** The composition of sockets/switch or box can be customised according to the specific needs of the client by using world-class accessories to be chosen by the client.

**Regulations:** products complying with the EN 60598-CEI 34-21; EN 60601-1-CEI62-5, UNI EN ISO 1197 CLASSE 1 standards, directive 93/42 EEC. These pages illustrate a number of standard composition proposals for Serena. The standard compositions are offered with only one type of control solution and electric services. Customised solutions can be designed. The lighting fittings used to achieve general indirect lighting and

lighting suitable for reading/visiting have been designed as independent lighting units. May be installed directly on a wall, may also be installed on two types of channels, using a simple and quick anchoring system, also after wall mounting and after the channel has been connected electrically.