




504 - Single arm

Made of steel, suited for poles with a diameter 60mm.



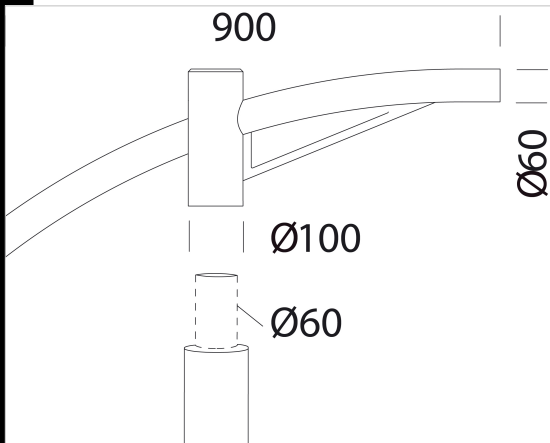
































| Code | Kg | WTot | Colour |
|-----------|------|------|------------|
| 991262-00 | 8.50 | 0 W | GREY9007 |
| 991263-00 | 9.10 | 0 W | GRAPHITE |
| 991264-00 | 8.50 | 0 W | ANTHRACITE |

Products



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Products

| | | | | | | | |
|---|---|---|--|--|--|---|--|
|  | - 3375 Mini Stelvio - high performance - street type |  | - 3376 Mini Stelvio - high performance - large areas |  | - 3370 Stelvio - high performance - street type |  | - 3374 Stelvio - high performance - large areas |
|  | - 3296 Sella 1 - HP |  | - 3396 Sella 2 - HP |  | - 3393 Sella 2 - Asymmetrical 60° |  | - 3480 Mini Giovi - high performance - large areas |
|  | - 3481 Mini Giovi - high performance - residential amenities ME |  | - 3482 Mini Giovi - high performance - cycleways |  | - 3475 Mini Giovi W1 - residential amenities |  | - 3476 Mini Giovi W2 - residential amenities |
|  | - 3477 Mini Giovi N1 - cycleways |  | - 3478 Mini Giovi M1 - residential amenities |  | - 3479 Mini Giovi T4 - large areas |  | - 3486 Mini Giovi left (L) - for pedestrian crossing |
|  | - 3487 Mini Giovi right (R) - for pedestrian crossing |  | - 3483 Mini Giovi AMBER - large areas |  | - 3484 Mini Giovi AMBER - residential amenities ME |  | - 3485 Mini Giovi AMBER - cycleways |
|  | - 3490 Giovi - high performance - large areas |  | - 3491 Giovi - high performance - residential amenities ME |  | - 3473 Giovi W1 - residential amenities |  | - 3495 Giovi W2 - residential amenities |
|  | - 3472 Giovi M1 - residential |  | - 3474 Giovi M2 - residential |  | - 3496 Giovi - left (L) - for |  | - 3497 Giovi - right (R) - for |
|  | - 3494 Giovi T4 - asymmetric - |  | - 3492 Giovi AMBER T4 - large |  | - 3493 Giovi AMBER - |  | - 3297 Sella 1 - left (L) -for |
|  | - 3298 Sella 1 - right (R) -for | | | | | | |

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated